

# D-Link Quick Installation Guide

This product can be set up using Internet Explorer 6.x or above

**DCS-3220G**  
2-Way Audio/Digital Zoom  
802.11G Wireless  
Internet Camera



## Before You Begin

You must have at least the following:

- Windows 98/Me/2000/XP
- A CD-ROM drive
- An available Ethernet connection

## Check Your Package Contents

These are the items included with your purchase:

If any of the below items are missing, please contact your reseller.



**DCS-3220G 2-Way Audio/Digital Zoom  
Wireless Internet Camera**



**CD-ROM with Manual and Software**



**CAT5 Ethernet Cable**



**Camera Stand**



**12V AC Power Adapter**



Using a power supply with a different voltage rating will damage this product and void the warranty.

# System Requirements

- Internet Explorer 6.x or above
- CPU: 1.7GHz or above
- Memory Size: 128MB (256MB recommended)
- VGA card resolution: 800x600 or above

**Note: If using multiple cameras for viewing/recording, the minimum requirements are a 2.4GHz or above CPU with 512MB memory and a 32MB video card.**

## 1

### Hardware Installation

#### Connect the Ethernet Cable

Connect an Ethernet cable to the network cable connector located on the Internet Camera's back panel and attach it to the network.



If you connect this camera directly to a PC, you will need a cross-over Ethernet cable. If you plug the camera into a hub or router, you will be able to use the cable included with your camera.

#### Connect an Audio Cable

Connect your speakers to the audio output jack on the back of the Internet Camera. For details on configuring the sound settings, please see the manual on the CD-ROM.



# 1

## Hardware Installation (continued)

### Attach the Antennas

Locate the antennas included with your DCS-3200G and attach them to the antenna connectors located on the back of the DCS-3220G



### Attach the External Power Supply

Attach the external power supply to the DC power input connector located on the Internet Camera's back panel (labeled DC 12V) and connect it to an AC power outlet.



When you have a proper connection, the **LED** (Light Emitting Diode) on the front of the camera will turn from red to green. The light may blink on and off and your computer may show an intermittent loss of connectivity if you have it directly connected to the camera. This is normal until you have configured your camera.




Power source is confirmed when the LED Power Indicator on the Internet Camera is illuminated.

# 2


## Installing the Installation Wizard

Insert the **DCS-3220G** CD into the CD-ROM drive.


Click on **Install Software**

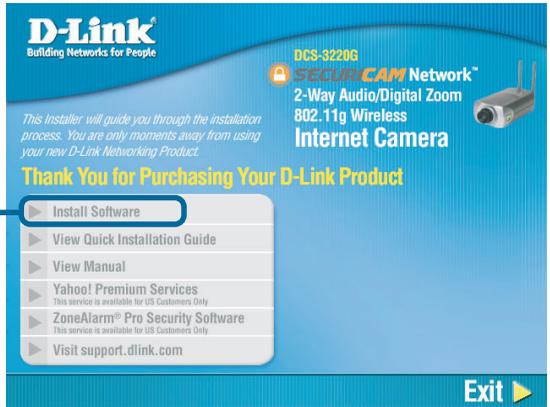

Click on **Installation Wizard**



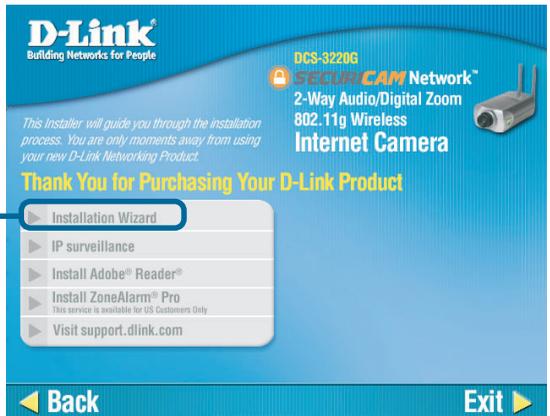


Click **Next**

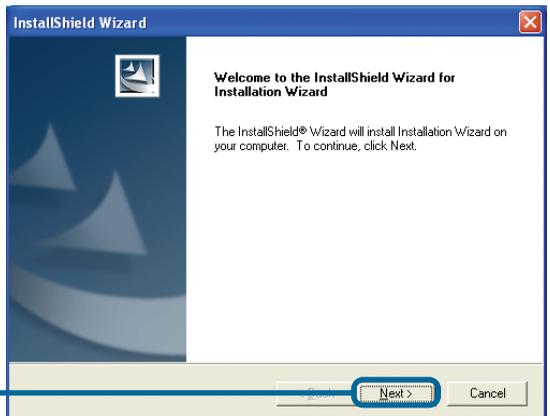

# 2

## Installing the Installation Wizard (continued)

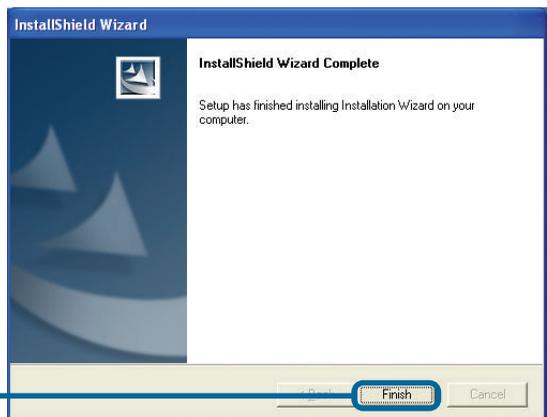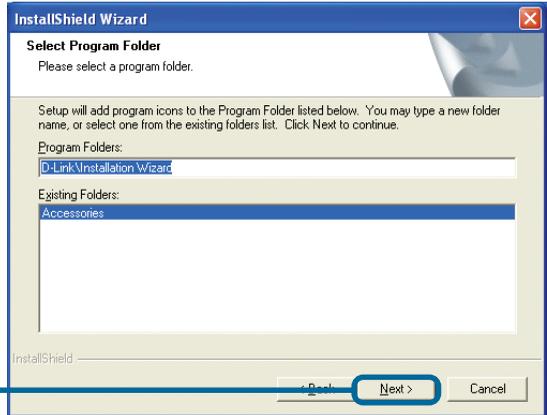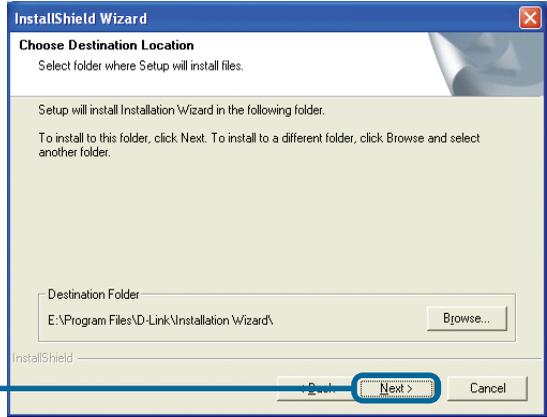


# 3

## Configuring Your Camera with the Installation Wizard


Double click on the **Installation Wizard** that was created on your desktop.



The software will search for cameras.

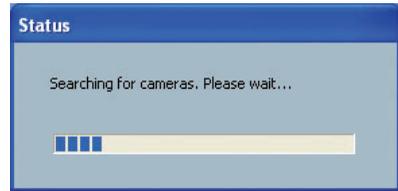

The Installation Wizard will appear and show the MAC address of the **DCS-3220G** and an IP Address (which may or may not be correct depending on what you have your **DCS-3220G** connected to). If you have a DHCP\* server on your network, there will be a valid IP Address displayed here, indicated by a “Yes” under the assigned column.

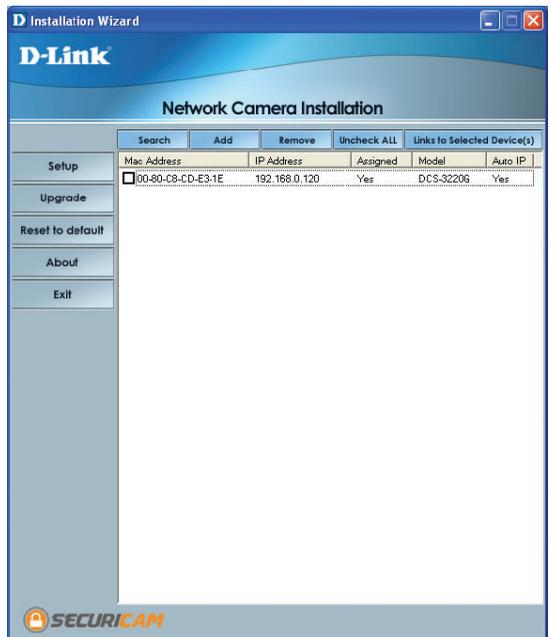

\*A DHCP server is a device that supplies IP Addresses to its clients that are on the same network.


# 3

## Configuring Your Camera with the Installation Wizard (continued)


If the Installation Wizard does not display any devices, lightly insert a paper clip into the reset opening on the unit's rear panel until the light starts to cycle (a series of blinks) twice, then let go.



Click **Search** to refresh the list of cameras if needed.

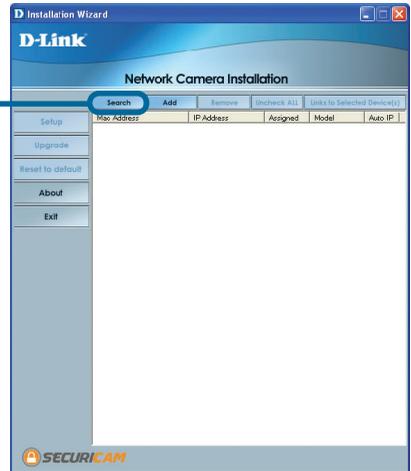


Once the camera appears, select the camera by placing a **Checkmark** in the box.

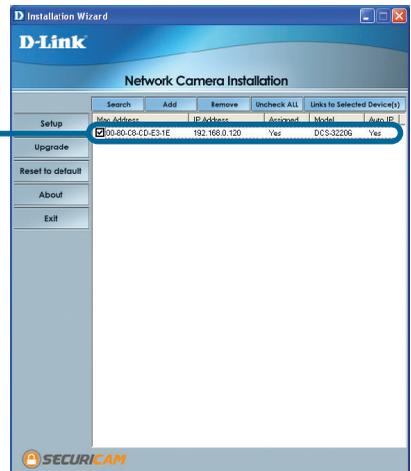

# 3


## Configuring Your Camera with the Installation Wizard (continued)

Click the **Setup** button

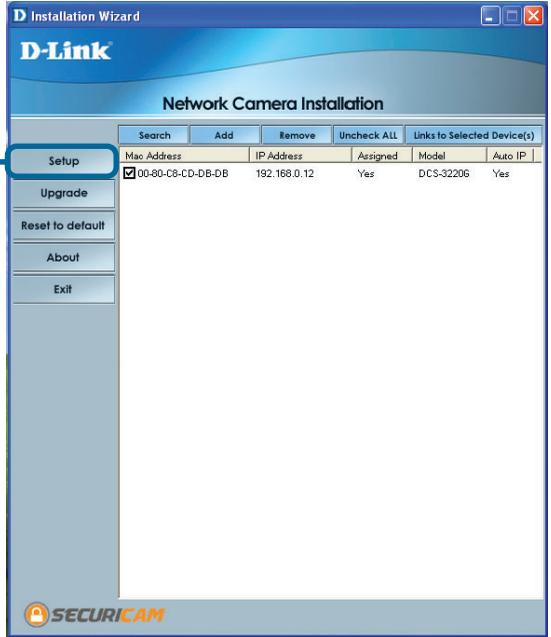

Enter an administrative password in the Root password and Confirm password fields.

Click the **Next** button

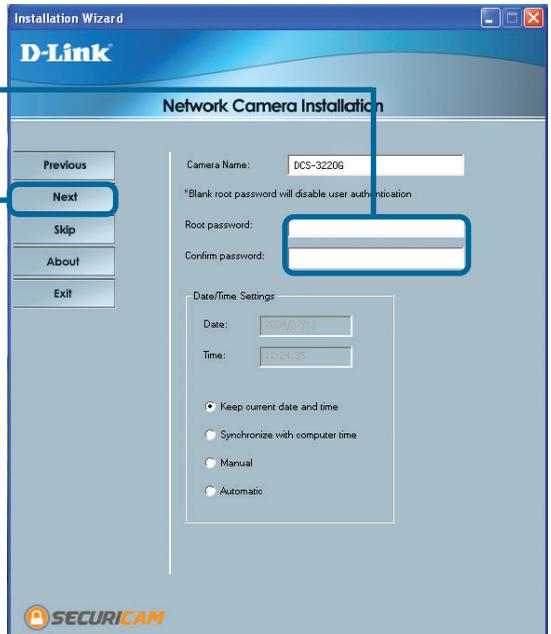

For details on the Date/Time Settings, please refer to the User Manual on the CD-ROM.


# 3

## Configuring Your Camera with the Installation Wizard (continued)


Uncheck the box labeled **Reset IP address at next boot**

Click the **Next** button


If you need to modify the IP settings, please refer to the user manual on the CD-ROM.

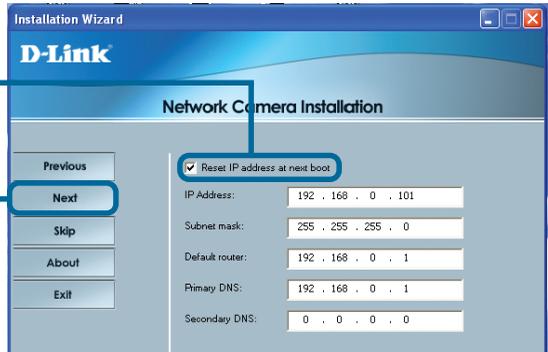

Here you can configure the Wireless Network Settings for the camera. For details on the Wireless Network Settings, please refer to the User Manual on the CD-ROM.

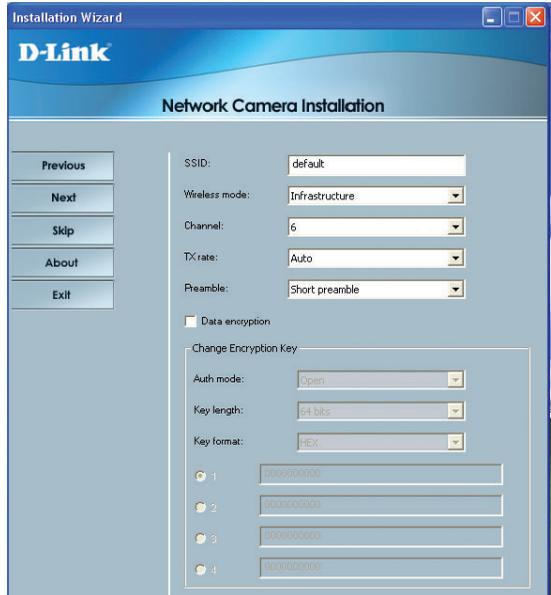


Click the **Apply** button

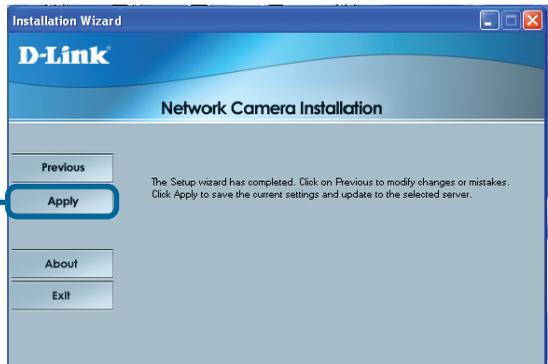


# 3

## Configuring Your Camera with the Installation Wizard (continued)

After the settings have been saved, the Done button will appear.

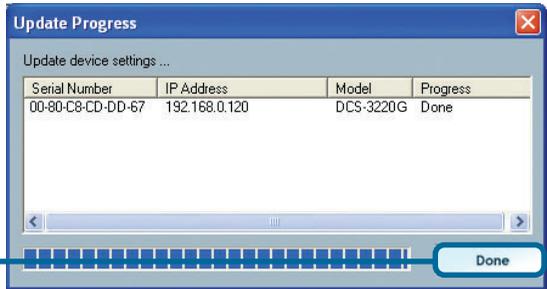

Click the **Done** button

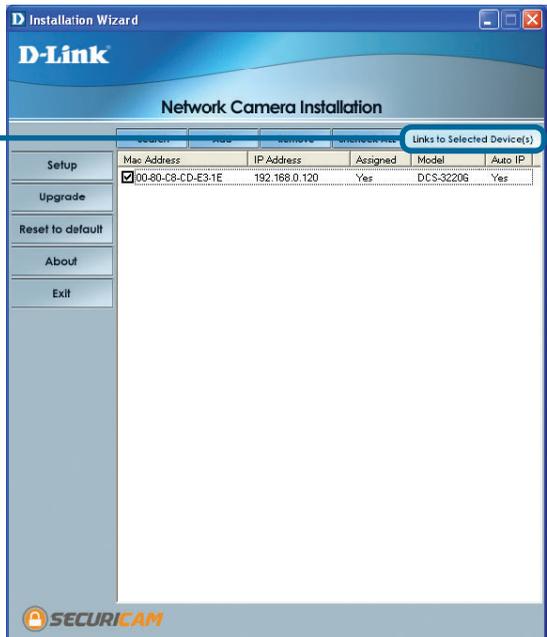


Click the button labeled **Link to Selected Device(s)**

# 4

## Viewing Your Internet Camera

After you click the button labeled **Link to Device(s)**, the **Installation Wizard** will automatically open your web browser to the IP address of the **DCS-3220G**, in this example it is: **http://211.21.25.252**. Your **DCS-3220G** may have a different IP Address.

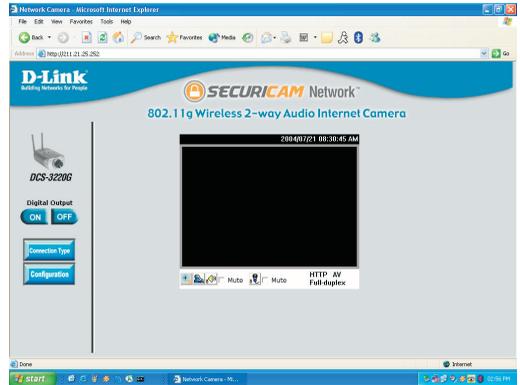

The installation and configuration of the **DCS-3220G Wireless Internet Camera** is now complete.

# Technical Support

You can find software updates and user documentation on the D-Link website.

D-Link provides free technical support for customers within the United States and within Canada for the duration of the warranty period on this product.

U.S. and Canadian customers can contact D-Link Technical Support through our website, or by phone.

## Tech Support for customers within the United States:

### ***D-Link Technical Support over the Telephone:***

(877) 453-5465

24 hours a day, seven days a week.

### ***D-Link Technical Support over the Internet:***

<http://support.dlink.com>

[email:support@dlink.com](mailto:support@dlink.com)

## Tech Support for customers within Canada:

### ***D-Link Technical Support over the Telephone:***

(800) 361-5265

Monday to Friday 7:30am to 12:00am EST

### ***D-Link Technical Support over the Internet:***

<http://support.dlink.ca>

[email:support@dlink.ca](mailto:support@dlink.ca)

