

Product Highlights

Rugged Construction

IP66 weatherproof housing makes DCS-F4604E ideal for surveillance applications

Full HD Resolution with Wide Dynamic Range

A high-resolution megapixel sensor provides 1080p resolution while Wide Dynamic Range technology ensures that you capture the details you need

Complete Day/Night Surveillance Solution

Keep watch over an area 24 hours a day with built-in night vision; the IR LEDs and automatic IR cut filter gives you a clear picture, even in complete darkness



DCS-F4604E

4MP Day & Night Indoor/Outdoor Varifocal Dome Network Camera

Features

Exceptional Video Quality

- 1 / 3" 4 Megapixel Progressive Scan CMOS sensor
- Maximum Resolution of 2592 x 1520
- Wide Dynamic Range image enhancement
- H.265, H.264, MJPEG codec support for streaming and recording
- Motion detection
- Privacy mask
- 3D filtering reduces noise in low-light environments

Outdoor Placement

- Built-in IR LED illuminator with a 35 meter range for use in dark areas
- Range of mounting options for flexible placement
- Rugged IP66 weatherproof housing

Network

- 10/100 Fast Ethernet port
- Power over Ethernet (PoE) ensures easy and flexible integration into your network

D-Link DCS-F4604E Vigilance HD Indoor/Outdoor PoE Dome Camera is a high definition professional surveillance and security solution suitable for small, medium, and large enterprises. The camera uses a high-sensitivity 1 / 3" 4 megapixel progressive scan CMOS sensor with onboard WDR image enhancement to deliver truly superior quality video in all conditions. The all-in-one rugged design makes this camera extremely reliable and ideal for deployment in surveillance applications.

Multiple Video Streaming & Recording

DCS-F4604E supports simultaneous streaming of H.265, H.264 and MJPEG video to provide both high quality and bandwidth-efficient compression formats. First & Second video streams are user configurable for high quality and optimized bandwidth recording while Third predefined low bandwidth stream is suitable for remote monitoring.

Continuous Monitoring

DCS-F4604E WDR image enhancement gives you improved image quality in environments with uneven or difficult lighting, so you can identify subjects that are backlit or in brightly lit areas. In lowlight situations, the IR cut filter automatically slides out of the way to use all available light. The DCS-F4604E also has built-in IR LED illuminators with a 35 meter range, allowing the camera to keep watch even in complete darkness. These features work together to give you a reliable surveillance camera capable of monitoring an area 24 hours a day.

4MP Day & Night Indoor/Outdoor Varifocal Dome Network Camera

Image Enhancement

DCS-F4604E WDR image enhancement gives you improved image quality in environments with varied light conditions, so you can identify subjects that are backlit or in brightly lit areas.

Smart defog function of camera can process parameters like Colour, Depth of Field and Radiation to create clear image in fog like conditions. The HLC feature allows camera to provide clear images during night vision by adjusting the brightness from strong light sources like head lights & spot lights.

2D and 3D Digital Noise Reduction technology provides clearer images during low light condition by processing the signal and reducing the noise.

Corridor Mode:

DCS-F4604E supports Corridor Mode. After enabling this mode, aspect ratio will be changed to 9:16. This feature is very helpful to deploy camera for monitoring narrow areas like tunnel, Passages or Corridors.

Region of Interest (ROI):

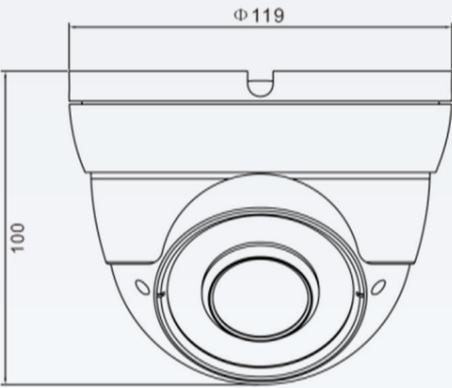
ROI allows you to configure the area of interest to be captured and recorded with higher resolution and rest of the area will be captured with lower resolution. This will help to optimize the required network bandwidth and save storage.

Technical Specifications

Camera Specification

Camera Hardware Profile	• 1 / 3" 4 Megapixel Progressive Scan CMOS sensor	• Focal Length: 2.8-12mm
	• 35 meter IR illumination distance	• Aperture : F1.2
	• Built-in Infrared-Cut Removable (ICR) Filter module, Smart IR support	• Field of view : 90° - 35°
	• Minimum illumination:	
	• 0.05 Lux Color mode	• Shutter Speed: Auto 1/5s ~ 1/20,000s
	• 0.01 Lux Black and White mode • 0 Lux Black and White mode with IR LED on	
Camera Housing	• IP66 compliant weatherproof housing	
Image Features	• Configurable image size, quality, frame rate, VBR/CBR (500kbps ~ 12 Mbps)	
	• Time stamp and text overlays	• Configurable Exposure, Brightness, Saturation, Contrast, Sharpness, White Balance, Rotate mode, Corridor mode
	• Customized text overlay	
	• Digital Noise reduction with 2D and 3D technology	
• No. of zones configurable for ROI : 8	• Image Enhancement with WDR, HLC	
Video Compression	• Simultaneous H.265, H.264 (BP/MP/HP)/MJPEG format compression	• JPEG for still images
	• H.265 multicast streaming	
Video Resolution	<ul style="list-style-type: none"> • Stream 1 2592x1520/2560x1440/2304x1296/1920x1080/1280x720 • Stream 2 D1 to QVGA • Stream 3 2592x1520/2560x1440/2304x1296/1920x1080/1280x720/D1/VGA/ 640 x 360/CIF/QVGA 	
Frame Rate	• Selectable upto 30 FPS	
External Device Interfaces	• 10/100 BASE-TX Ethernet port with PoE	
Network		
Network Protocols	• IPv6	• SMTP client
	• IPv4	• HTTP/HTTPS
	• TCP/IP	• PPPoE
	• UDP	• UPnP
	• ICMP	• RTP/RTSP/RTCP
	• DHCP client	• Multicast
	• NTP client	• ONVIF compliant
	• DNS client	• SNMP support
Security	• Administrator and user group protection	• HTTP and RTSP authentication
	• Remote client access control	• HTTPS encryption for web access hardware watchdog

4MP Day & Night Indoor/Outdoor Varifocal Dome Network Camera

System Management	
System Requirements for Web Interface	• IE 11, Chrome, Firefox
Event Management	• Motion detection
	• Alerts to SMTP client
Remote Management	• Event notification and uploading of snapshots via e-mail
	• Multiple event notifications only on mails
Remote Management	• Configuration interface accessible via web browser
OS and Mobile Support	• Take snapshots
OS and Mobile Support	• Windows 7/8/XP/Vista/2000 and higher
OS and Mobile Support	• Android, iOS
DCMS System Requirement	• Operating System: 32 Bits - MS Windows XP pro SP3/Visa SPI/Win 7 SPI/ Win10 64 Bits - Win 7 SPI/Win Server 2008 R2
DCMS Software Function	• Control and manage up to 64 channels
General	
Weight	• 650G
Power	• DC 12V & PoE (802.3af)
Power Consumption	• < 2.5W @ IR Off, < 5W @ IR ON
Temperature	• Operating: -10°C ~ 50°C
Humidity	• Operating: 0% ~ 90% RH non-condensing
Dimension	• Ø 119mm X 100mm
	
Order Information	
Part Number	Description
DCS-F4604E	4MP Day & Night Indoor/Outdoor Varifocal Dome Network Camera
Optional Accessory	
Part Number	Description
DCS-FCA326	 Junction Box
DCS-FCA323	 Wall mount
DCS-FCA629A	 Junction Box