

D-Lite Cloud Overview

The user can access the free D-Lite Cloud from the web to manage and configure off-site locations. The internet traffic does not pass through the cloud, compliant with the latest data protection and privacy regulations. Security is assured with out-of-band, SSL-encrypted management plane backed with a 99.99% uptime service level agreement. If the Cloud service is down this will not affect the service of local locations.



DLA-X303

D-Lite AX3000 Outdoor Access Point

Features

- Cloud Management
- Zero-Touch Deployment
- Intuitive Interface
- Unlimited Scalability
- Band Steering
- Bandwidth Optimization
- Auto Channel Management
- Authentication via Customizable Captive Portal, 802.1x and RADIUS Server
- Social Login for Guest Wi-Fi Access
- End-to-End Encryption
- Event Log and Change Log
- Over-the-Air Firmware Upgrades
- Real Time Traffic Reporting & Analytics*
- Automated Monitoring & Alerts
- Multi-Tenant & Role-Based Administration
- Map View
- AI Diagnostics
- IP67 water and dust-proof housing

The DLA-X303 is as a D-Lite Cloud-Managed AX3000 Outdoor Access Point (AP) is designed to provide robust, high-performance connectivity in challenging outdoor environments. It is the best-in-class outdoor access point designed specifically for enterprise environments. Featuring 802.11ax Wi-Fi 6 concurrent on both 2.4GHz and 5GHz bands, the DLA-X303 D-Lite Cloud-Managed AX3000 Access Point offers high combined data rates to wireless clients. It provides lightning-fast access to bandwidth intensive applications such as data, voice and video streaming, even in highly congested environments.

Solution Benefits

1. Easy-to-Configure APs and Switches

Users no longer have to configure each access point individually, D-lite Cloud offers an intuitive cloud interface to mass or individually configure your access points, ideal for lean IT businesses. Settings are saved on the cloud and pushed to the devices The D-Lite cloud-managed switch enables lean IT to easily provision, manage and even troubleshoot their entire network. Port configurations can be easily configured individually or performed in a batch.

2. Easy & Rapid AP & Switch Deployment

After pre-configuring the AP or Switch towards a certain profile, the AP & Switch can then be quickly deployed remotely and be up and running without configuration at the target site.

3. Unlimited Scalability

With D-Lite Cloud, the controller is managed in the cloud from a single centralized interface and no longer faces hardware scalability limitations commonly found in traditional on-premise controllers. D-Lite Cloud supports unlimited access points and switches, ideal for small to medium-sized businesses.

4. Management Multi-Site Management

From the centralized interface, IT professionals and System Integrators can manage multi remote sites with features including creating accounts, generating reports*, and remotely installing, managing and monitoring the wireless and wired infrastructure for multiple users – all with minimal commitment in terms of training time, IT resources and capital.



Intuitive Dashboard Interface



D-Lite APP



5. Management Intuitive Dashboard

An Intuitive and Comprehensive Dashboard to Configure and Monitor your Network

- Online and Offline Devices
- Number of Clients
- Radio Utilization View
- Client Traffic and Analysis view
- Device Traffic and Analysis view
- CPU & Memory Usage
- Alert Notifications


6. D-Lite APP for Easy Deployment and Monitoring

D-Lite Cloud offers APP to configure and monitor your network on the go.

- Quick Setup via QR Code
- Real-Time Monitoring
- Comprehensive Configurations



Easy-to-Configure APs and Switches

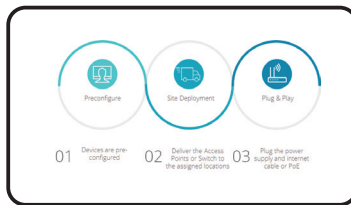

Easy & Rapid AP & Switch Deployment



Unlimited Scalability
Management Multi-Site Management



Management Intuitive Dashboard



Side View



Bottom View



Back View



Top View

802.11ax Wi-Fi 6

- Wi-Fi 6 AP provides high performance connectivity
- Up to 3 Gbps combined throughput²
- Increased client device battery life
- Faster speeds on both 2.4 GHz and 5 GHz bands
- Optimized encoding, packing more data into the same radio waves

Power over Ethernet (PoE)

- Supports IEEE 802.3at PoE
- Convenience of using one cord for both power and Internet access
- Reduces installation and energy expenses
- Flexibility to install the DLA-X303 in places that don't have access to electrical infrastructure

IP67 water and dust-proof housing for outdoor environments

- Weather resistant from temperatures between -30°C and 60°C

Best-in-class Built for Enterprise AP

- Powerful management, monitoring and troubleshooting functionality with D-Lite Cloud
- MU-MIMO
- IEEE 802.3az Energy-Efficient Ethernet (EEE)
- Integrated Self Cluster Mode
- Remote access via cloud
- Allows for a high number of concurrent users

Enterprise Security

- 192-bit Enterprise and 128-bit Personal encryption
- SSID/Guest/Station Isolation
- IP/MAC address filtering
- Captive Portal (Google, E-mail auth, Self reg.)
- Supports RADIUS client and Cipher negotiation
- Supports External Captive Portal and walled garden

Technical Specifications


Hardware Parameters

Chipset	IPQ5018+QCN6102+QCA8337
CPU frequency	Quad-Core 1GHz
Memory	DDR3L 512Mbyte
Flash	128MB Nand Flash
Wi-Fi	2T2R 2.4GHz 802.11b/g/n/ac/ax, 573.5Mbps, 2T2R 5.8GHz 802.11a/n/ac/ax, 2402Mbps
Device Interfaces	1 x RJ45 10M/100M/1000M WAN Ethernet(with PoE), 1 x RJ45 10M/100M/1000M LAN Ethernet 1 x Reset Button, 1 x Power Jack
Wi-Fi Antenna	2 x 5dBi internal 2.4GHz antennas, 2 x 7dBi internal 5.8GHz antennas


Wi-Fi Features

Standard	802.11a/b/g/n/ac/ax 802.11b/g/n/ax, frequency 2.400 GHz to 2.4835 GHz 802.11a/n/ac/ax, frequency 5.150 GHz to 5.350 GHz & 5.470 GHz to 5.725 GHz & 5.725 GHz to 5.850 GHz country-specific restrictions apply	
Modulation Schemes	OFDM - BPSK,QPSK, 16-QAM, 64-QAM 256-QAM 1024-QAM DSSS - DBPSK, DQPSK, CCK	
Max Transmit Power	2.4GHz: 11n max 29dbm (26dbm per chain) 11ac max 29dbm (26dbm per chain) 11ax max 29dbm (26dbm per chain)	5GHz: 11n max 29dbm (26dbm per chain) 11ac max 29dbm (26dbm per chain) 11ax max 29dbm (26dbm per chain)
RX Sensitivity	2.4GHz: 11n max - 71dbm 11ac max - 63dbm 11ax max - 59dbm	5GHz: 11n max - 71dbm 11ac max - 61dbm 11ax max - 56dbm(HE80) 11ax max - 53dbm(HE160)
Transfer Rate	2.4GHz: HE20: up to 286.8Mbps HE40: up to 576.5Mbps	5GHz: HE20: up to 286.8Mbps HE40: up to 576.5Mbps HE80: up to 1201Mbps HE160: up to 2402Mbps

2.4GHz Antenna Pattern

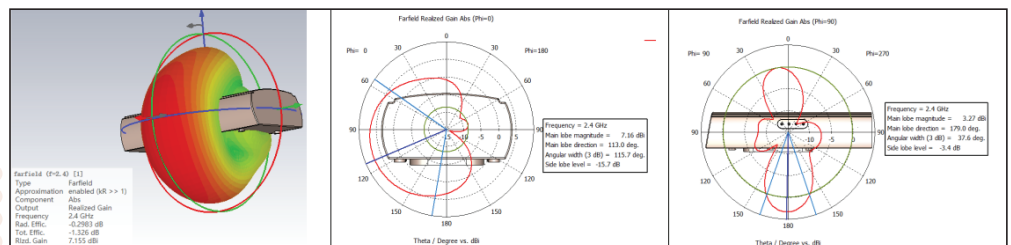

5GHz Antenna Pattern

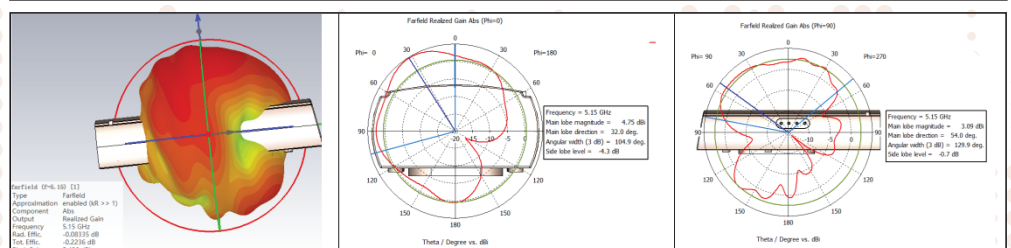

Technical Specifications

General Software Features

Management Features:

- WEB GUI
- Command Tool Telnet For Debug
- APP
- SSH
- HTTP/HTTPS
- Login Authentication
- NTP
- Settings Backup & Import & Recovery
- Firmware Local/Remote Upgrade
- System Reboot & Scheduled-Restart
- Network Self-Checking
- Fault Alarm
- Fault Collection
- Diagnostic Tools (ping/tracert/nslookup)

Wireless Spec Features:

- Roaming
- AP Mesh
- Power Percent Adjustment
- Removing Low-RSSI STAs
- Wi-Fi Optimization
- Beamforming
- Auto Channel
- 160MHz Huge Frequency Width
- WEP/WPA/WPA2/WPA3 Security
- Guest SSIDs
- Separate Authentication for SSID
- Schedule Working for SSID
- Speed Limit for SSID
- Hidden SSID
- User Isolation for SSID

Wireless Main Protocols:

- IEEE 802.11a
- IEEE 802.11b
- IEEE 802.11g
- IEEE 802.11n
- IEEE 802.11ac
- IEEE 802.11ax
- IEEE 802.11h(DFS)
- IEEE 802.11e(WMM)
- IEEE 802.11k/v/r

Network Main Protocols:

- RFC0768 UDP
- RFC0791 IP
- RFC0792 ICMP
- RFC0793 TCP
- RFC0826 Ethernet ARP
- RFC0894 IP over Ethernet
- RFC0922 Broadcasting Internet Datagrams
- RFC0950 Internet Standard Subnetting Procedure
- RFC2516 PPP Over Ethernet (PPPoE)
- RFC1332 PPP Internet Protocol Control Protocol
- RFC1042 Transmission of IP Datagrams over IEEE 802 Networks

Other Spec Features:

- Kick Off for Wireless User
- Block Internet for User
- Internet Time Schedule for User
- Speed Limit for User
- User Firewall MAC/IP/Port/URL filter for Data-Stream
- Bluetooth*
- Night Mode(Light Control)
- Roaming Test
- Manual DNS

Network Spec Features:

- IPv4/IPv6 dual stack
- Static/IPoE/PPPoE Connection Type
- IPv6 Stateless/Stateful
- Bridge Mode

Physical

Operating Temperature	: -30°C~60°C	Dimensions	: 235.5 x 100.7 x 70mm
Storage Temperature	: -30°C ~ 70°C	Weight	: 530g
Operating Humidity	: 5%~95% (typical)	Mean Time Between Failure (MTBF)	: >250000 hours
Power Supply	: PoE or 12V/1A DC	Mounting Options	: Wall/Pole Mount
IP Rating	: IP Rating Min IP67		

EMC Safety

Regulation Compliance	• CE
Safety Regulations	• UL
Green Standard	• RoHS

Order Information

Part Number	Description
DLA-X303	D-Lite Cloud-Managed AX3000 Outdoor Access Point

¹ Active D-Link D-Lite account is required.
² Maximum wireless signal rate derived from the IEEE Standard 802.11ax specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate. Environmental factors will adversely affect wireless signal range. *Optional feature only for project requirements.