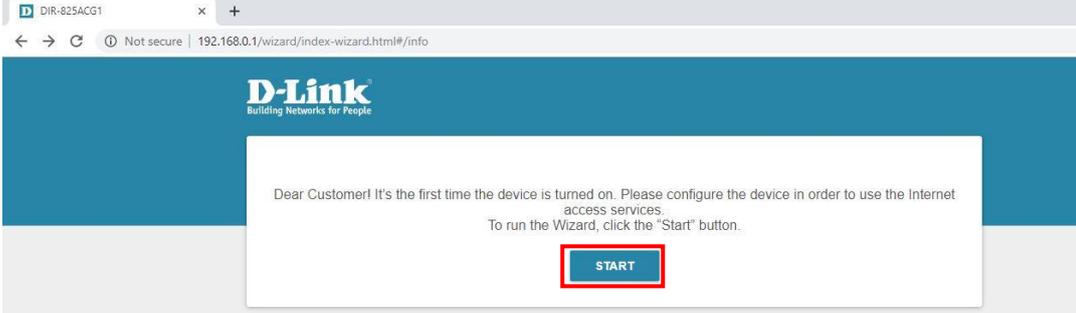
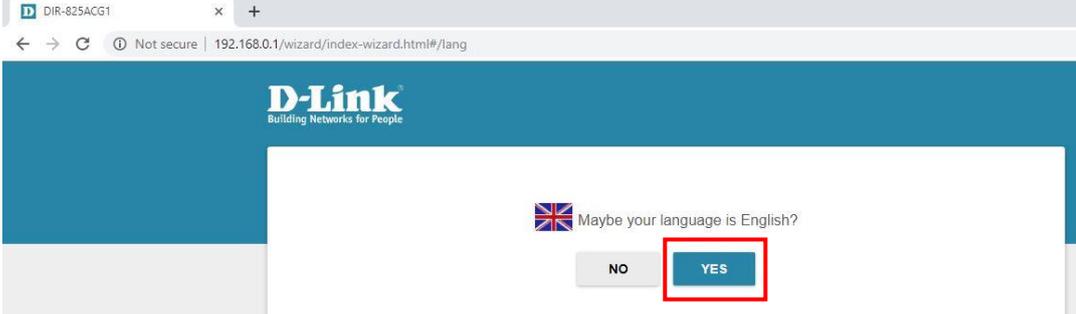
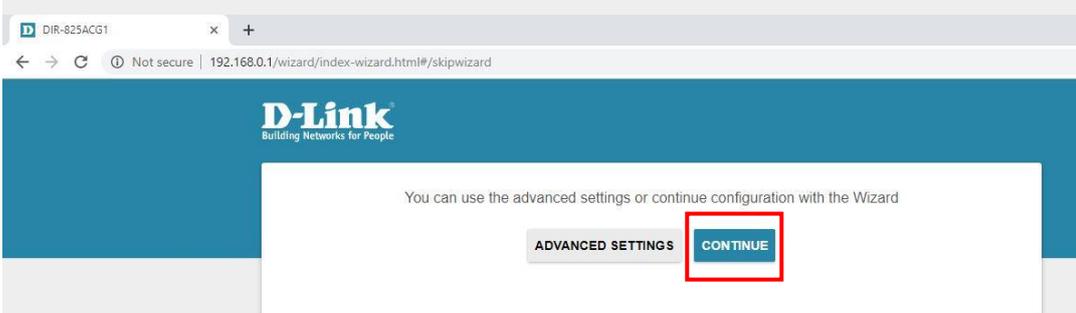


D-Link DIR-825 Repeater mode

To use your DIR-825 as a repeater, the software version will need to 1.02 or 3.01-3.06. Firmware version 7.00 is not supported.

- 

1. Screenshot of the D-Link DIR-825ACG1 wizard info page. The browser address bar shows "192.168.0.1/wizard/index-wizard.html#/info". The page displays the D-Link logo and a message: "Dear Customer! It's the first time the device is turned on. Please configure the device in order to use the Internet access services. To run the Wizard, click the 'Start' button." A red box highlights the "START" button.
- 

2. Screenshot of the D-Link DIR-825ACG1 wizard language selection page. The browser address bar shows "192.168.0.1/wizard/index-wizard.html#/lang". The page displays the D-Link logo and a message: "Maybe your language is English?" with a UK flag icon. Two buttons are visible: "NO" and "YES". A red box highlights the "YES" button.
- 

3. Screenshot of the D-Link DIR-825ACG1 wizard skip wizard page. The browser address bar shows "192.168.0.1/wizard/index-wizard.html#/skipwizard". The page displays the D-Link logo and a message: "You can use the advanced settings or continue configuration with the Wizard". Two buttons are visible: "ADVANCED SETTINGS" and "CONTINUE". A red box highlights the "CONTINUE" button.

4.

DIR-825ACG1 x +
Not secure | 192.168.0.1/wizard/index-wizard.html#/manual

D-Link
Building Networks for People

Device mode

Connection method
Wi-Fi

Work mode
Repeater

SSID, SSID_Ext, LAN

BACK NEXT

5.

DIR-825ACG1 x +
Not secure | 192.168.0.1/wizard/index-wizard.html#/manual

D-Link
Building Networks for People

LAN

Automatic obtainment of IPv4 address

⚠ Automatic obtainment of IPv4 address sufficiently protects against use of the same addresses in one LAN. In order to avoid IPv4 address conflicts, static IPv4 addresses of LAN devices should not coincide with addresses from the address range assigned by an upper-level router (or a local DHCP server).

Hostname*
dlinkap8851.local

🕒 Specify a domain name ending with .local. In order to access the web-based interface using the domain name, enter this name with a dot and slash at the end in the address bar of the web browser (for example, dlinkap12ab.local.).

BACK NEXT

6.

DIR-825ACG1 x +
Not secure | 192.168.0.1/wizard/index-wizard.html#/manual

D-Link
Building Networks for People

Wi-Fi Client

Frequency band
2.4 GHz

Network authentication
Open

Network name (SSID)*


BSSID

Enable encryption WEP

WIRELESS NETWORKS

BACK NEXT


7.

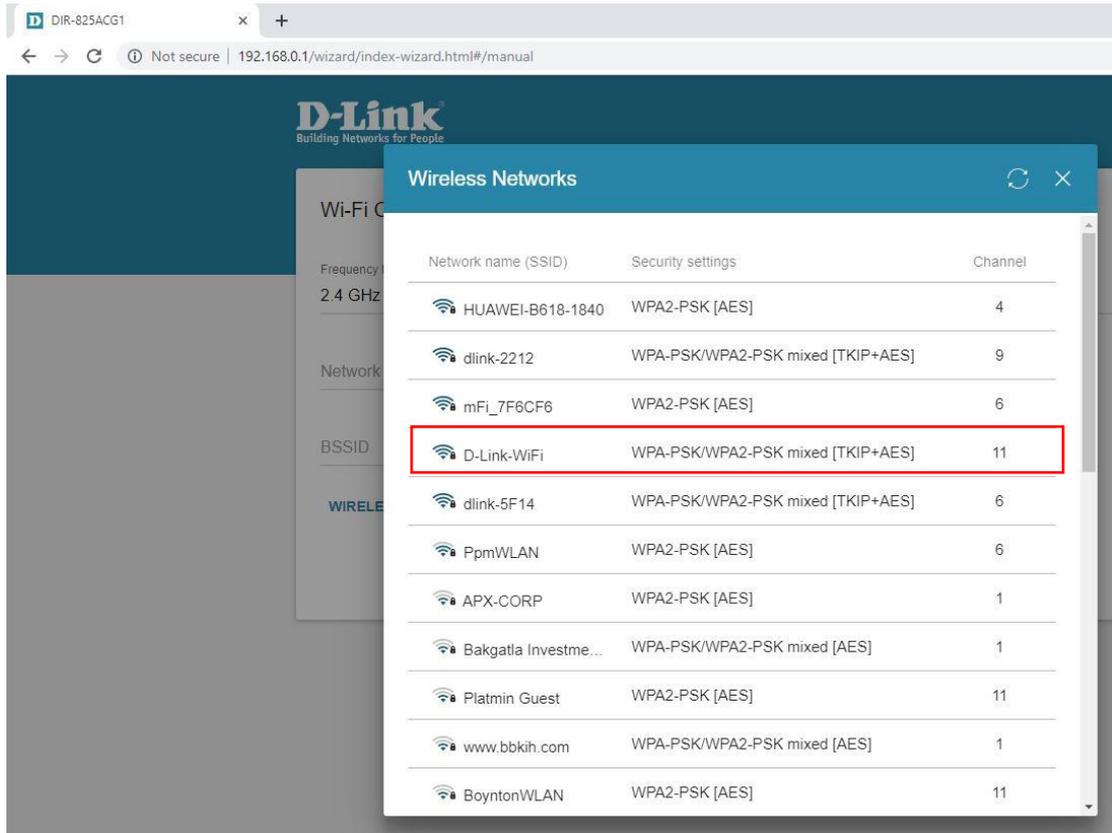

The screenshot shows a web browser window with the URL `192.168.0.1/wizard/index-wizard.html#/manual`. The page displays a list of wireless networks. A modal window titled "Wireless Networks" is open, showing a table of detected networks. The network "D-Link-WiFi" is highlighted with a red box.

Network name (SSID)	Security settings	Channel
HUAWEI-B618-1840	WPA2-PSK [AES]	4
dlink-2212	WPA-PSK/WPA2-PSK mixed [TKIP+AES]	9
mFi_7F6CF6	WPA2-PSK [AES]	6
D-Link-WiFi	WPA-PSK/WPA2-PSK mixed [TKIP+AES]	11
dlink-5F14	WPA-PSK/WPA2-PSK mixed [TKIP+AES]	6
PpmWLAN	WPA2-PSK [AES]	6
APX-CORP	WPA2-PSK [AES]	1
Bakgatla Investme...	WPA-PSK/WPA2-PSK mixed [AES]	1
Platmin Guest	WPA2-PSK [AES]	11
www.bbkih.com	WPA-PSK/WPA2-PSK mixed [AES]	1
BoyntonWLAN	WPA2-PSK [AES]	11

8.

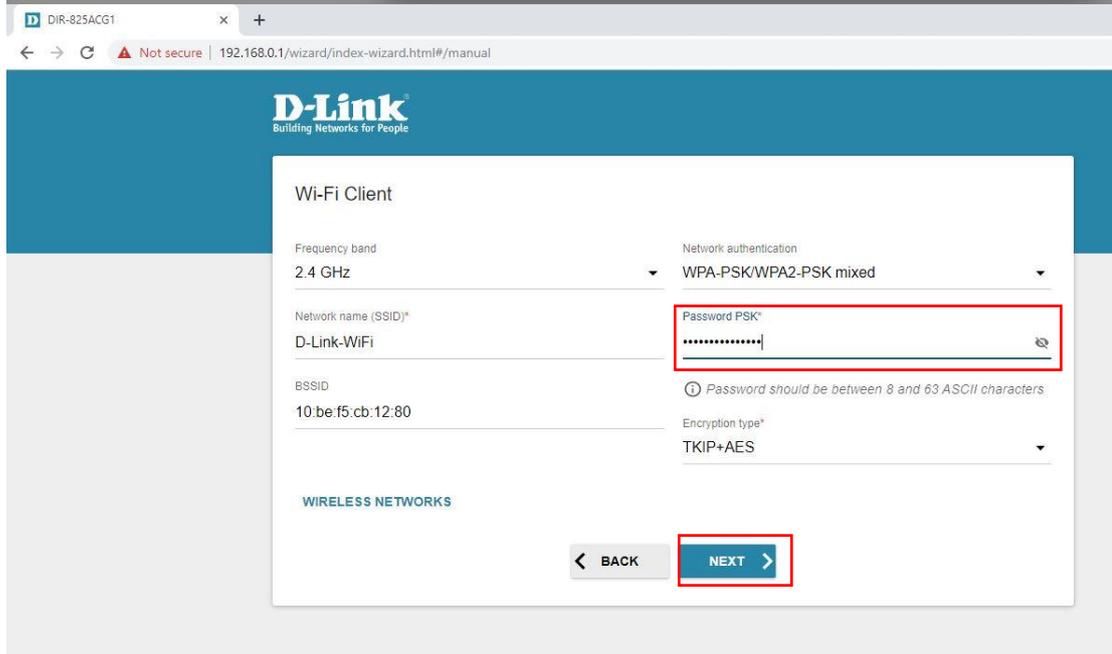

The screenshot shows the "Wi-Fi Client" configuration page in the D-Link wizard. The "Network authentication" is set to "WPA-PSK/WPA2-PSK mixed" and the "Encryption type" is "TKIP+AES". The "Network name (SSID)" is "D-Link-WiFi" and the "BSSID" is "10.be:f5.cb:12:80". The "Password PSK" field is highlighted with a red box and contains a masked password. The "NEXT" button is also highlighted with a red box.

Frequency band: 2.4 GHz

Network authentication: WPA-PSK/WPA2-PSK mixed

Network name (SSID)*: D-Link-WiFi

BSSID: 10.be:f5.cb:12:80

Password PSK*: [masked]

Encryption type*: TKIP+AES

WIRELESS NETWORKS

BACK NEXT

9.

The screenshot shows a web browser window with the address bar displaying "192.168.0.1/wizard/index-wizard.html#/manual". The page title is "Building Networks for People". The main content area is titled "Wireless Network 2.4 GHz" and contains the following elements:

- Two checked checkboxes: "Enable" and "Broadcast wireless network 2.4 GHz".
- A note: "Disabling broadcast does not influence the ability to connect to another Wi-Fi network as a client."
- A "Network name*" field containing the text "WiFi_EXT".
- A note: "The number of characters should not exceed 32".
- An unchecked checkbox: "Open network".
- A "Password*" field with masked characters "*****".
- A note: "Password should be between 8 and 63 ASCII characters".
- A "USE" button with the text "Use the same parameters as on the root access point."
- A "RESTORE" button with the text "You can restore network name and security that was set before applying factory settings."
- "BACK" and "NEXT" navigation buttons at the bottom.

10

The screenshot shows a web browser window with the address bar displaying "192.168.0.1/wizard/index-wizard.html#/manual". The page title is "D-Link Building Networks for People". The main content area is titled "Changing web-based interface password" and contains the following elements:

- A message: "For security reasons, please change the password used to access the device's settings."
- An "Admin password*" field with masked characters "*****".
- A note: "Password should be between 1 and 31 ASCII characters".
- A "Password confirmation*" field with masked characters "*****".
- "BACK" and "NEXT" navigation buttons at the bottom.

11

The screenshot shows a web browser window with the address bar displaying "192.168.0.1/wizard/index-wizard.html#/summary?prev=manual". The page title is "Summary". It contains the following configuration details:

- LAN**
 - Dynamic IPv4: Yes
 - Hostname: dlinkap8851.local
- Wi-Fi 2.4 GHz**
 - Enable: Yes
 - SSID: WIFL_EXT
 - Encrypt: WPA2-Personal
 - Password: 123456789
- Wi-Fi 5 GHz**
 - Enable: Yes
 - SSID: WIFL_5G_EXT
 - Encrypt: WPA2-Personal
 - Password: 123456789
- Device**
 - Model: DIR-825ACG1
 - Software version: 3.0.6
 - Serial number: QXE51J6000210
 - IP: 192.168.0.1
- Login data**
 - Username: admin
 - Password: *****

At the bottom of the configuration area, there is a "SAVE CONFIGURATION FILE" button. Below the configuration area, there are two buttons: "BACK" and "APPLY".

12

The screenshot shows the D-Link configuration wizard during a reboot. The browser address bar shows a URL with a next step: "http%253A%252F%252Fdlinkap8851.local%252Fwizard%252Findex-wizard.html%253Ffinish%253Dy8". The D-Link logo is visible at the top left. A white message box in the center of the screen contains the text: "Now the device is rebooting in order to complete configuration".

13. After the router has rebooted, you will need to disconnect the cable and reconnect after 5 seconds. This will update your IP address as well as give internet if the correct password was entered on step 8.