



DKVM-16

16-Port KVM Stackable Switch for Business

Fast Access to 128 Computers Through 1 Console

The DKVM-16 16-port stackable KVM switch kit is a high port-density, cost-effective solution for business. Designed for control of multiple servers from a single set of keyboard, mouse and monitor; this switch allows you to stack up to 8 units per stack to obtain up to 128 KVM ports. The DKVM-16 switch packs 16 KVM ports in a rack-mount housing for installation in a standard 19-inch standard equipment rack, suitable for deployment in a centralized computer room.

High Performance and Easy Management of Port Traffic/Server Control

Each of the 16 KVM ports of the switch has a dedicated microprocessor that allows you to intelligently manage port traffic and simultaneously boot up attached PCs. 2 control buttons located on the front panel gives you one touch access to your attached PCs, and the user-friendly On-Screen Display menu allows you to configure your DKVM-16 switch's settings. The On-Screen Display also provides an easy interface for naming each PC and selecting any one of them. Featuring hot-plug, auto-scan, keyboard hot-keys and audible feedback, this switch makes it simple to manage all of your computers.

Up to 128 KVM Port Scalable Expansion

To expand your control ability, the DKVM-16 allows 8 banks to be stacked together through their daisy-chain ports. This allows you to control up to 128 computer servers from a single keyboard, video monitor and mouse. To allow for flexibility, a combination of 16-port DKVM-16 and 8-port DKVM switches can also be daisy-

chained together in a stack of 8 banks.

Versatile Functions

The DKVM-16 supports VGA, SVGA and MultiSync monitors at up to 1920 x 1440 resolution. Integrated mouse conversion technology allows older AT type computers with serial mouse ports to be connected to the DKVM-16 using the included serial-to-PS/2 mouse converter. Both AT and PS/2 types of keyboards are supported, and most popular mice are compatible with the DKVM-16, including Microsoft IntelliMouse® and Microsoft IntelliMouse Explorer®.

Convenient and Cost-Saving

The idea is to save you the money and space by allowing you to control multiple computers from a single set of keyboard, monitor and mouse. This KVM switch allows you to use a better and bigger monitor and keyboard, and it saves space on your desktop and makes your desk look neater.

Key Features

- Allows control of 16 computers from 1 keyboard, mouse and monitor
- Daisy-chains up to DKVM-16 and DKVM-8E switches
- No software required
- Daisy-chain ports for up to 8 banks of DKVM-16 and DKVM-8E
- Hot plug: add PCs or remove connected PCs for maintenance without powering down the KVM switch or PCs
- No DIP-switch setting needed, auto detects daisy chain bank
- On-Screen Display menu
- Password protection
- Switches PCs by On-Screen Display, push button or keyboard's "Hot Key"
- Auto-scan mode with user selectable time interval
- Audible feedback when switching
- Automatic recalls CAPS LOCK, NUM LOCK and SCROLL
- LOCK keys' status for each computer
- Supports VGA, SVGA and MultiSync monitors
- Supports 1920 x 1440 resolution, 200MHz and above refresh bandwidth
- Integrated mouse conversion technology allows connection of AT type computers with serial mouse ports while using a PS/2 mouse at console
- Keyboard/mouse emulation for error-free boot ups
- Microsoft IntelliMouse®, Microsoft Intellimouse Explorer® support and emulation
- Supports AT and PS/2 types of keyboards
- Uses inexpensive and commonly found standard KVM cables

DKVM-16

Technical Specifications

KVM Switch

Hardware

Number of Computer Connections

16

Number of Display LED Indicators

3

Keyboard Connector

6-pin mini-DIN female

Mouse Connector

6-pin mini-DIN female

Monitor Connector

15-pin HD DB type female

Daisy Chain Connectors

- 2 6-pin mini-DIN
- 1 15-pin HDDB

Number Daisy Chain Port

1

Number of Daisy-Chained Units per Stack

8

Maximum Accessible PCs per Stack

128

Manual Selection

Push buttons

Hot Keys

Yes

Switching Confirmation

Buzzer

Keyboard State

Saved and restored

Keyboard

PS/2

Mouse

PS/2

Video Resolution Support

1920 x 1440

Video Bandwidth Support

200M Hz

Physical & Environmental

Power Supply

- DC 12V, 1A
- Through external power adapter

Housing Enclosure

Metal

Operating Temperature

0° to 50 °C

Storage Temperature

-20° to 60 °C

Dimensions

235 mm (W) x 41 mm (L) x 82 mm (H)
Standard 19-inch rack-mount width

Weight

3.5 kg

Software

On-Screen Display

Yes

Driver


No driver or software required

Support OS

- Microsoft Windows ME, NT, 95, 98, 98 SE, 2000, XP, 3.x
- DOS
- NetWare
- HP-UX Unix
- SCO Unix
- UnixWare
- Linux

Box Includes

- DKVM-16 port KVM switch
- External power adapter
- 1 set of 0.9 meter (3 ft) KVM cable
- 2 sets of 1.8 meter (6 ft) KVM cables
- 2 DB-9 9-pin to mini-DIN 6-pin converters
- 2 DIN 5-pin to mini-DIN 6-pin converters
- User's manual
- Rack-mount kit
- 8 screws

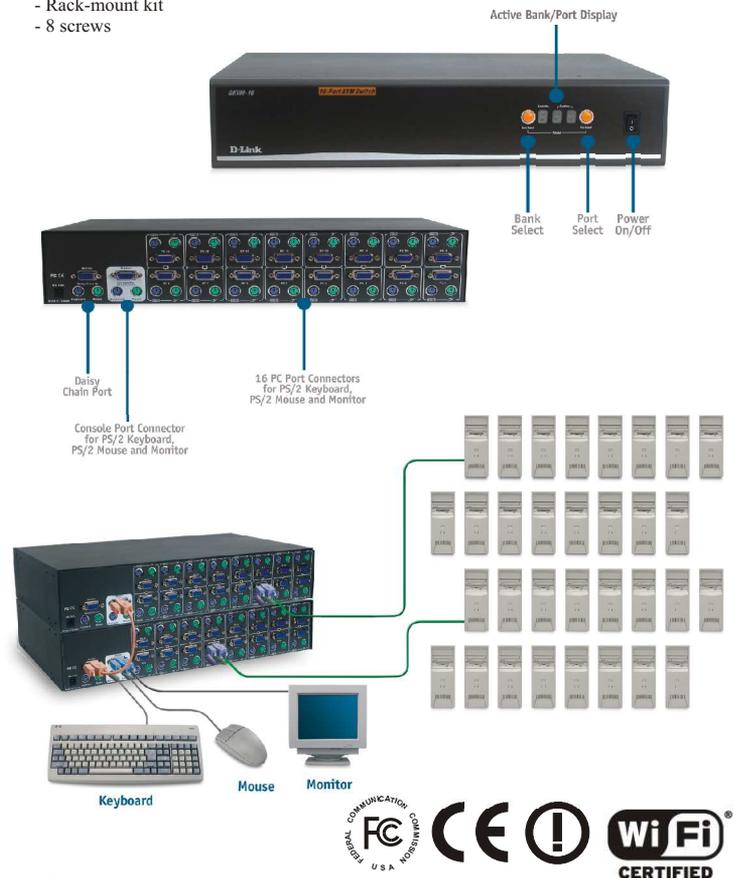

Ordering Information

DKVM-16

16-Port KVM Switch

Please specify your order as follows:

BDKVM-16

For USA

DKVM-16/A

With UL approved power adapter

DKVM-16/B

With UK standard power adapter

DKVM-16/E

With EU standard power adapter

DKVM-16/N

With Australia standard power adapter

D-Link®

Specifications subject to change without prior notice.
D-Link is a registered trademark and AirPlusXtremeG+ is a trademark of D-Link Corporation/D-Link System Inc. All other trademarks belong to their proprietors.

U.S.A

Canada

Europe

Germany

France

Benelux

Italy

Iberia

Sweden

Norway

Denmark

Finland

Singapore

Australia

Japan

China

India

Middle East

Turkey

Chile

Brasil

South Africa

Russia

Taiwan

D-Link Corp.

TEL: 1-949-788-0805

TEL: 1-905-8295033

TEL: 44-20-8731-5555

TEL: 49-6196-77990

TEL: 33-1-30238688

TEL: 31-10-2045740

TEL: 39-2-2900-0676

TEL: 34-93-4090770

TEL: 46-(0)8564-61900

TEL: 47-22-309075

TEL: 45-43-969040

TEL: 358-9-2707-5080

TEL: 65-6774-6233

TEL: 61-2-8899-1800

TEL: 81-3-5434-9678

TEL: 86-10-8518-2533

TEL: 91-22-652-6696

TEL: 9714-8834234

TEL: 90-212-335-2553

TEL: 56-2-232-3185

TEL: 55-11-3094-2910

TEL: 27(0)1266-52165

TEL: 7-095-737-3389

TEL: 886-2-2910-2626

TEL: 886-2-2916-1600

FAX: 1-949-753-7033

FAX: 1-905-8295095

FAX: 44-20-8731-5511

FAX: 49-6196-7799300

FAX: 33-1-30238689

FAX: 31-10-2045880

FAX: 39-2-2900-1723

FAX: 34-93-4910795

FAX: 46-(0)8564-61901

FAX: 47-22-309085

FAX: 45-43-424347

FAX: 358-9-2707-5081

FAX: 65-6774-6322

FAX: 61-2-8899-1868

FAX: 81-3-5434-9868

FAX: 86-10-8518-2250

FAX: 91-22-652-8914

FAX: 9714-8834394

FAX: 90-212-335-2500

FAX: 56-2-232-0923

FAX: 55-11-3094-2921

FAX: 27(0)1266-52186

FAX: 7-095-737-3390

FAX: 886-2-2910-1515

FAX: 886-2-2914-6299



RECYCLABLE

Rev. 01 (Aug. 2003)