


Storage Setup On The DSL-2750U

F A T 32 devices are limited to 32GB maximum and the file can't be greater than 4GB, The below setup was done with an 1TB NTFS Mass Storage (the external drive should however be self powered by the power supply that came with the external drive),

Please make sure the unit is on the latest firmware. You can download the firmware at <ftp.d-link.co.za> . If you are still unsure as to which firmware to download, then simply e-mail your query to support@d-link.co.za or call the D-Link Africa offices on +27 (0)12 661 2025/3,

How to Update the Firmware (If your unit is on the latest firmware, skip this step):

Logon to the unit through your web browser via the default IP address 10.0.0.2 of the DSL-2750U,

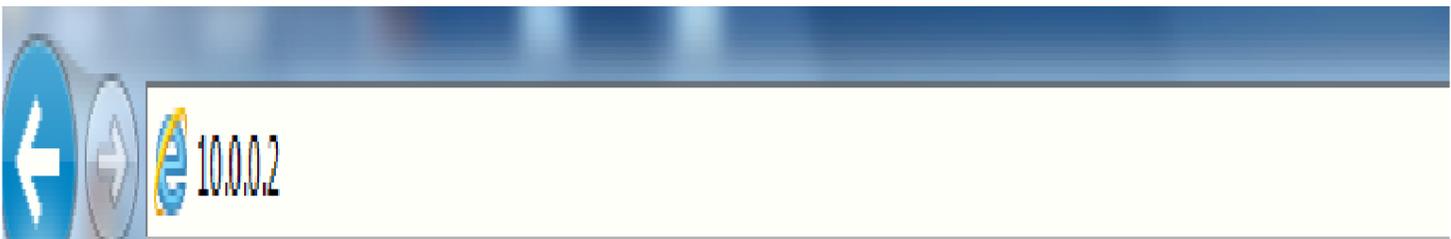

1. Username : admin
2. Password : admin

Product Page: DSL-2750U

Firmware Version: AF_1.57_T10

D-Link

LOGIN

Welcome to DSL-2750U Web Management

Username : admin ▾

Password : ●●●●

Remember my login info.

Login

WIRELESS

Document Compiled By Andries Dique

- Go to Maintenance, then Firmware Update and simply Browse to the firmware you downloaded earlier,

D-Link

DSL-2750U // SETUP ADVANCED **MAINTENANCE** STATUS HELP

System
Firmware Update
Access Controls
Diagnostics
System Log
Logout

FIRMWARE UPDATE

Step 1: Obtain an updated firmware image file from your ISP.

Step 2: Enter the path to the image file location in the box below or click the "Browse" button to locate the image file.

Step 3: Click the "Update Firmware" button once to upload the new image file.

NOTE: The update process takes about 2 minutes to complete, and your DSL Router will reboot. Please DO NOT power off your router before the update is complete.

FIRMWARE UPDATE

Current Firmware Version : AF_1.00_T10
Current Firmware Date : Sep 9 2011

Firmware File Name :

Helpful Hints...
Please Note: This page displays your device firmware version and information that will be helpful for D-Link technicians should you require any technical support. If your router is working without issue, there should be no need to update your firmware. This information is just for your reference as it is often unnecessary to upload new firmware to your router.
[More...](#)

WIRELESS

Document Compiled By Andries Dique

- After the update you will need to restore the unit to its factory default settings,

The screenshot shows the D-Link DSL-2750U web interface. The top navigation bar includes 'DSL-2750U', 'SETUP', 'ADVANCED', 'MAINTENANCE' (highlighted with a red border), 'STATUS', and 'HELP'. The left sidebar contains 'System', 'Firmware Update', 'Access Controls', 'Diagnostics', 'System Log', and 'Logout'. The main content area is divided into four sections:

- SYSTEM -- REBOOT**: Contains the text 'Click the button below to reboot the router.' and a 'Reboot' button.
- SYSTEM -- BACKUP SETTINGS**: Contains the text 'Back up DSL Router configurations. You may save your router configurations to a file on your PC. Note: Please always save configuration file first before viewing it.' and a 'Backup Settings' button.
- SYSTEM -- UPDATE SETTINGS**: Contains the text 'Update DSL Router settings. You may update your router settings using your saved files.' and a form with 'Settings File Name :', a text input field, a 'Browse...' button, and an 'Update Settings' button.
- SYSTEM -- RESTORE DEFAULT SETTINGS**: Contains the text 'Restore DSL Router settings to the factory defaults.' and a 'Restore Default Settings' button, which is highlighted with a red border and pointed to by a red arrow labeled '5'.

On the right side, there is a 'Helpful Hints...' section with text explaining the reboot and backup functions, and a 'More...' link.

Document Compiled By Andries Dique

- *Go To Advanced, then Storage Service,*
- *Select Storage Device Info,*

The screenshot shows the D-Link DSL-2750U web interface. At the top, the D-Link logo is displayed. Below it, a navigation bar contains tabs for SETUP, ADVANCED, MAINTENANCE, STATUS, and HELP. The ADVANCED tab is highlighted with a red box. On the left side, a vertical menu lists various settings, with 'Storage Service' highlighted by a red box. The main content area is divided into two sections: 'STORAGE SERVICE -- STORAGE DEVICE INFO' and 'NETWORK TOOLS -- STORAGE USER ACCOUNT CONFIGURATION'. The first section contains a 'Show Storage Device Info.' link, which is highlighted with a red box. The second section contains a 'Storage User Account' button. Red arrows and text annotations indicate the navigation steps: '6. Go to Advanced, then Storage Service' points to the ADVANCED tab and the Storage Service menu item, and '7. Select Storage Device Info' points to the 'Storage Device Info' button.

Document Compiled By Andries Dique

- *Information on the external storage device being used should be displayed,*

The screenshot shows the D-Link DSL-2750U Advanced Settings page. The 'ADVANCED' tab is selected. The 'Storage Service' option in the left sidebar is highlighted with a red box. The main content area displays 'STORAGE DEVICE INFORMATION' with a descriptive text box and a table of storage device details. A red box highlights the table's data row, and a red arrow points to it from the text 'Information on the Storage device being used' below. The right sidebar contains 'Helpful Hints...' and 'More...' links.

Volumename	FileSystem	Total Space	Used Space
usb1_1	ntfs	953866	671047

Information on the Storage device being used

Document Compiled By Andries Dique

- *Select User Accounts,*
- *Select ADD,*

The screenshot shows the D-Link DSL-2750U web interface. The top navigation bar includes 'DSL-2750U', 'SETUP', 'ADVANCED', 'MAINTENANCE', 'STATUS', and 'HELP'. The 'ADVANCED' tab is selected. The main content area is titled 'STORAGE USERACCOUNT CONFIGURATION' and contains the instruction 'Choose Add, or Remove to configure User Accounts.' Below this is a table with columns for 'UserName', 'HomeDir', and 'Remove'. At the bottom of the table are 'Add' and 'Remove' buttons. The 'Add' button is highlighted with a red box. A red arrow points to the 'Add' button with the text '9. Select ADD'. Another red arrow points to the 'User Accounts' sub-menu item in the left sidebar with the text '8. Select User Accounts'. The left sidebar includes 'Storage Service', 'Multicast', 'Network Tools', 'Routing', 'Schedules', and 'Logout'. The right sidebar contains 'Helpful Hints...' and a description of Mass Storage.

Document Compiled By Andries Dique

- Username and Password as desired by the user,
- Volume name (the directory you want to share)can be found under Storage Device Information,

The screenshot shows the 'Storage Service' configuration page. On the left, a sidebar menu has 'Storage Service' highlighted. The main content area is titled 'STORAGE DEVICE INFORMATION' and contains a table with the following data:

Volumename	FileSystem	Total Space	Used Space
usb1_1	ntfs	953866	671047

A red box highlights the 'Volumename' column, and a red arrow points to the value 'usb1_1' with the label 'Volume Name' below it. On the right side, there is a note: 'Note : volume name used for samba user account setting.' and a 'More...' link.

The screenshot shows the 'Advanced' setup page for a D-Link DSL-2750U router. The 'Storage Service' option in the sidebar is highlighted. The main content area is titled 'STORAGE USERACCOUNT CONFIGURATION' and includes the following sections:

STORAGE USERACCOUNT CONFIGURATION
Choose Add, or Remove to configure User Accounts.

STORAGE USERACCOUNT

UserName	HomeDir	Remove

Below the table are 'Add' and 'Remove' buttons.


ADD STORAGE USERACCOUNT

Username: Andre
 Password: ●●●●
 Confirm Password: ●●●●
 volumeName: usb1_1


At the bottom are 'Apply' and 'Cancel' buttons.

Document Compiled By Andries Dique

- *Open the RUN command and enter the following details, In this example it will be the following `\\10.0.0.2\Andre` ,*

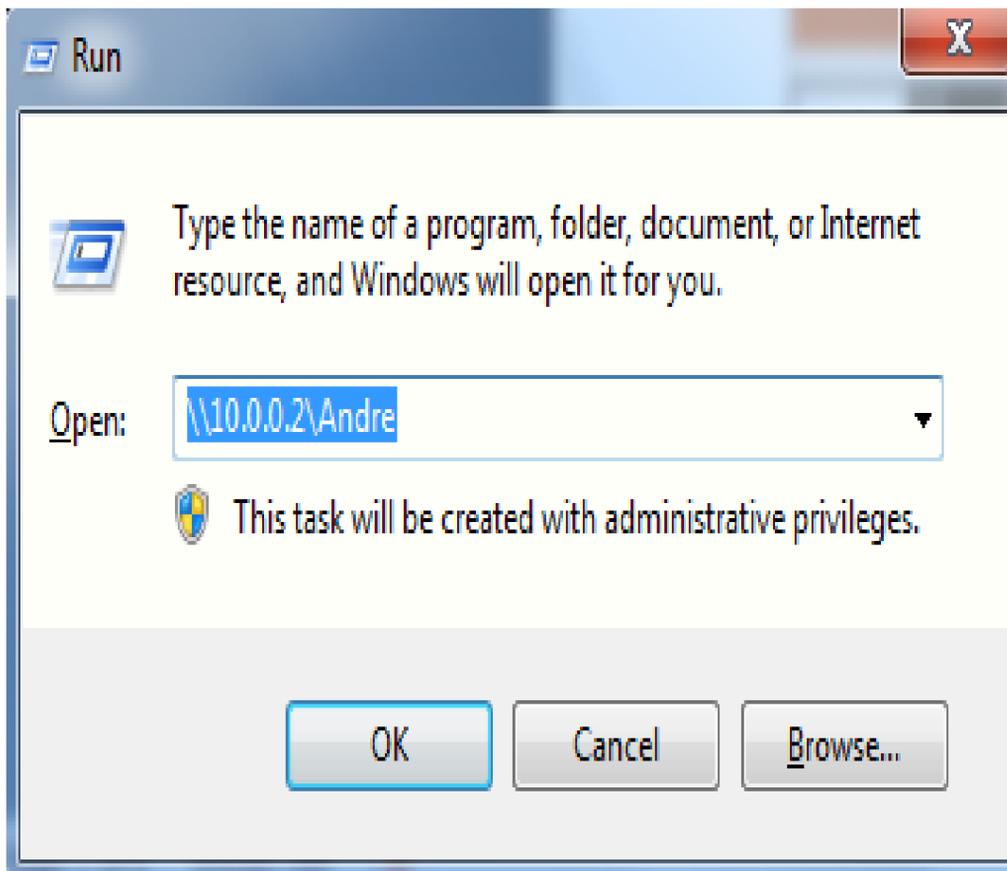


- *Insert the Username and Password you selected and Click OK,*

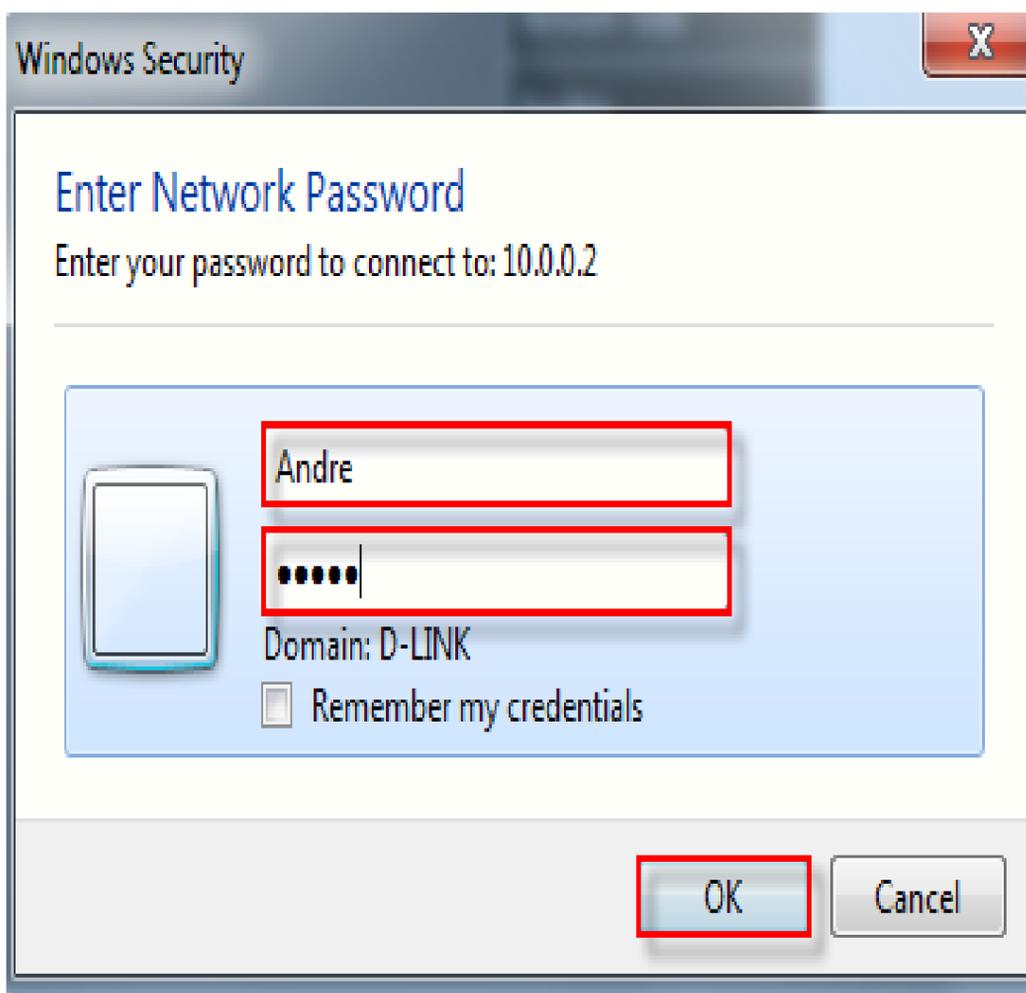

Document Compiled By Andries Dique

- *You should now have access to the hard drive,*

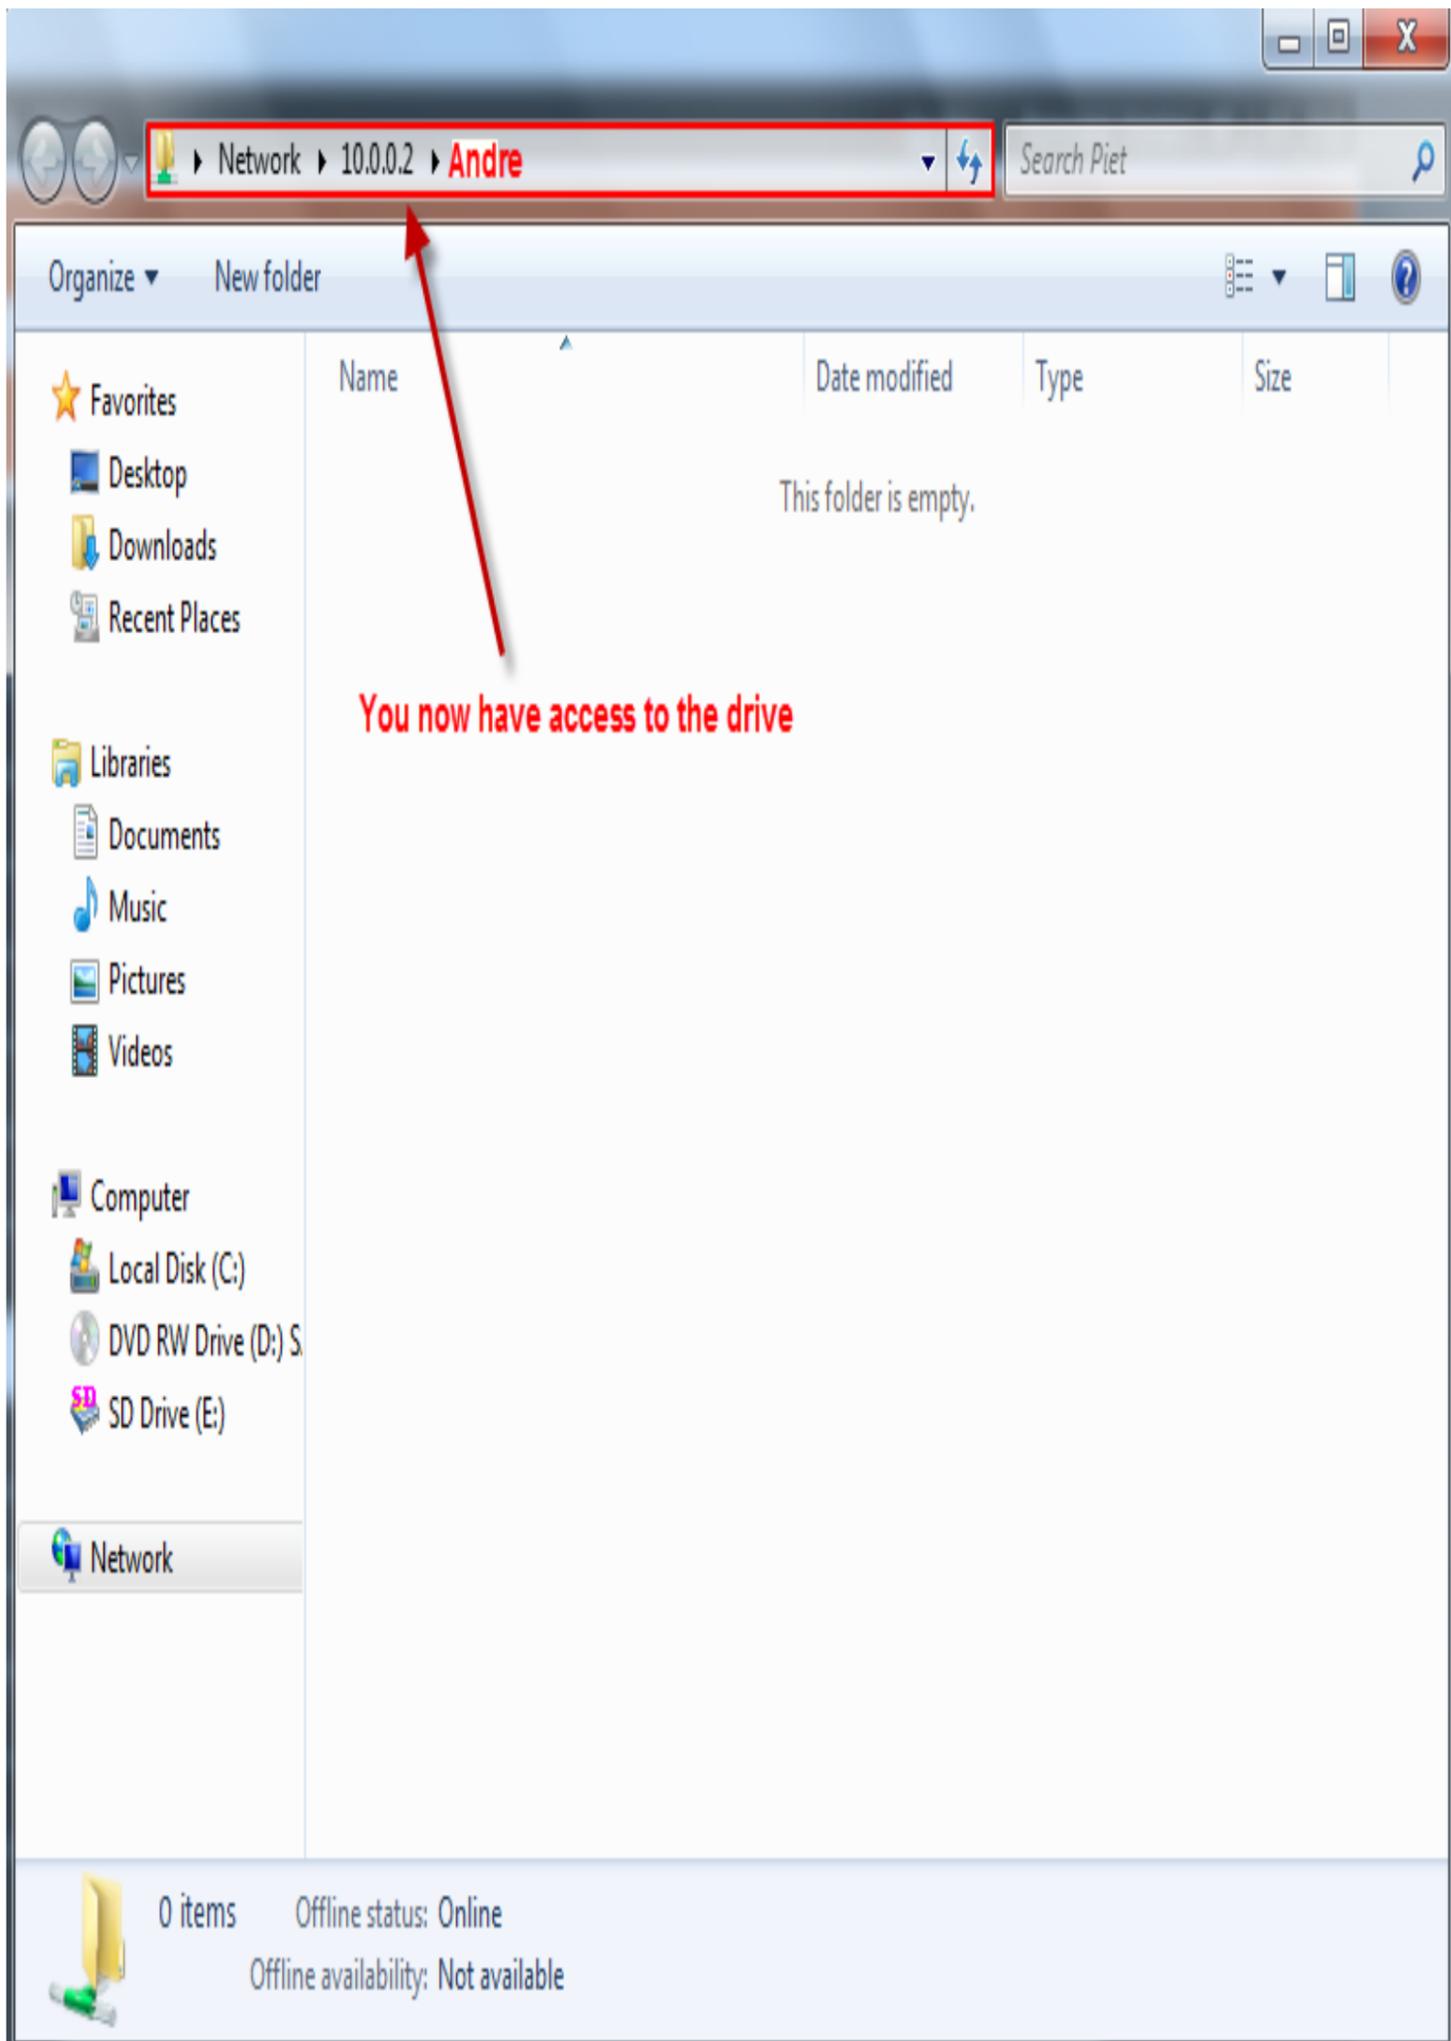

Document Compiled By Andries Dique