
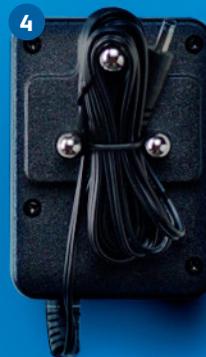


Telkom

Let's
connect
you.

The Telkom Easy Guide to set up your
D-Link DSL 2750U Router.

First, unpack your new router.

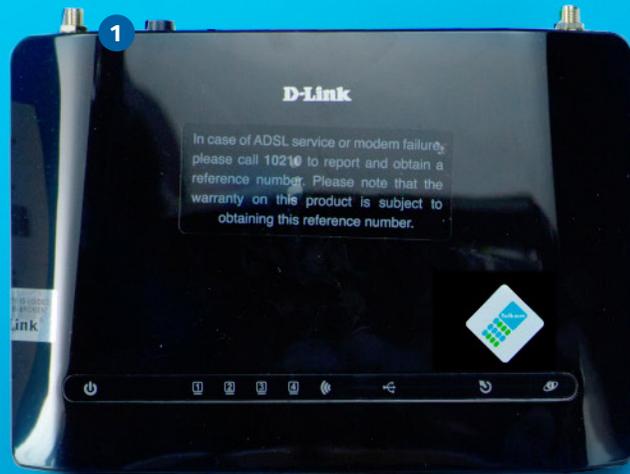

- 1 Your D-Link DSL Router
- 2 The quick reference guide
- 3 2 external antennae
- 4 1 power supply cord
- 5 1 LAN cable
- 6 2 telephone cables

Let's get started.

1

Connect the 12vDC power supply into your router and into a power socket.

2

Plug one end of the grey cable into the power supply port marked IN and the other end into the telephone jack on the wall.

3

Plug the red cable from power supply marked OUT into the red socket on the back of router marked DSL.

4


Plug the yellow LAN cable into the yellow port on the router and the other end into the LAN port on your computer.



Setting up the Router.

1

Open your internet browser and go to **http://10.0.0.2** and click **Enter**. Type in **admin** for both the username and password. Click **Login**.

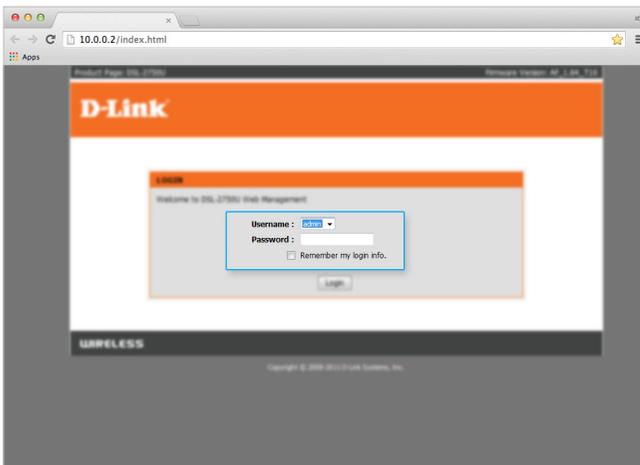


2

From the D-Link page that loads, click **Status** to see whether the router is configured.



3


If your router is not online and not configured click **Setup > Setup Wizard**

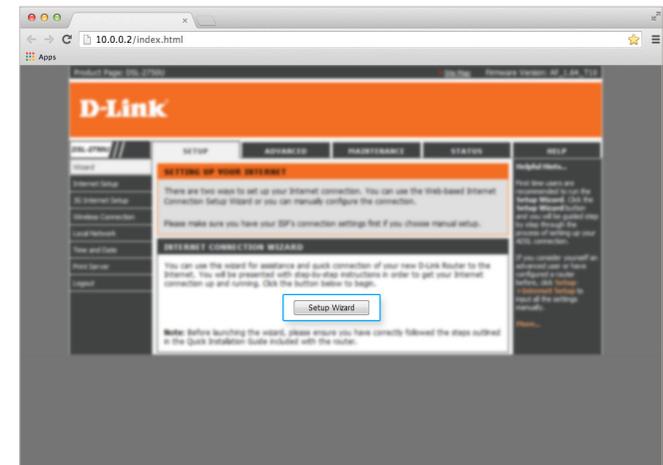

Almost there...


4

Change the password to your preferred password. Click **Next** on the Time and Date page. There is no need to change these.

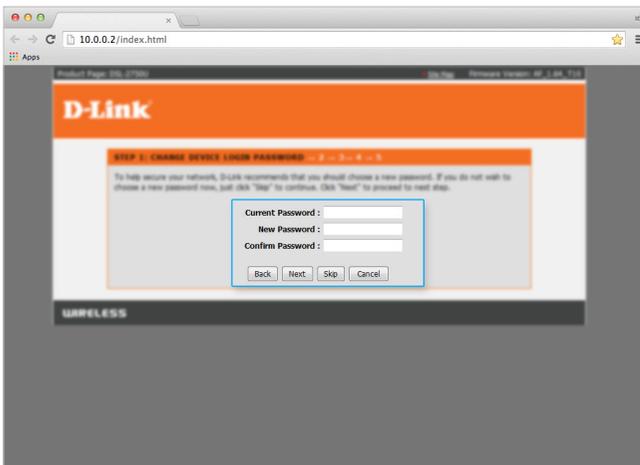


5

Select **South Africa** from the country dropdown and **Telkom** as your Internet Services Provider. Enter the username and password that were SMS'd to you and click **Next**.

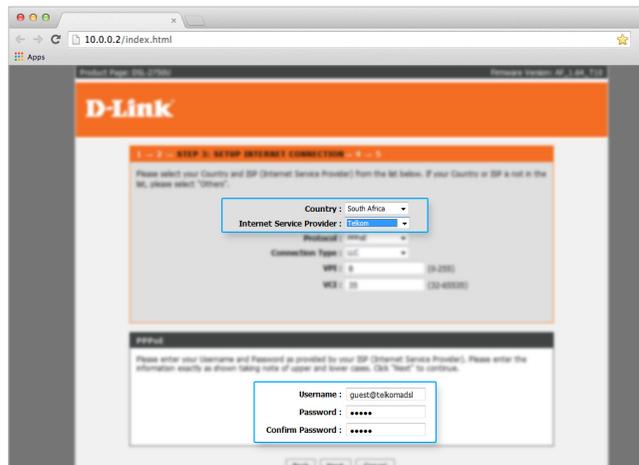

6

Enter your preferred name for your Wi-Fi network, and your password. Check the Summary page and click **Apply**.

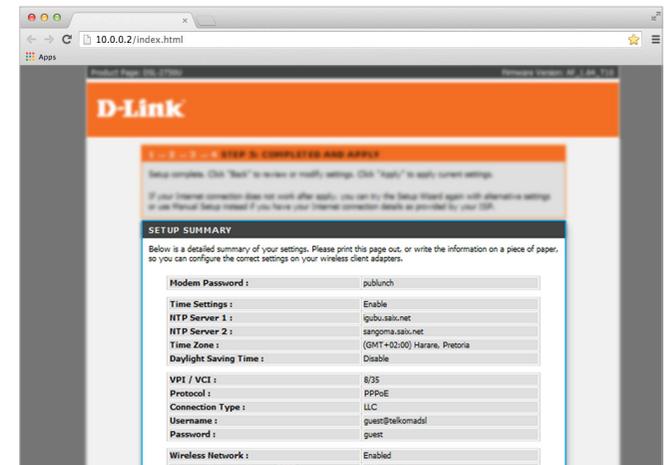

Last few steps.


7

If you were accessing the router via Wi-Fi up to this point, you will need to reconnect to the router using the new Wi-Fi name and password. It is important to log out properly by clicking **Logout**.




8

Activate your internet account by typing **www.telkom.co.za/verifyadsl** to the address field of your internet browser. Press **Enter**. Complete the fields with your telephone number and order number and click on **Submit**.

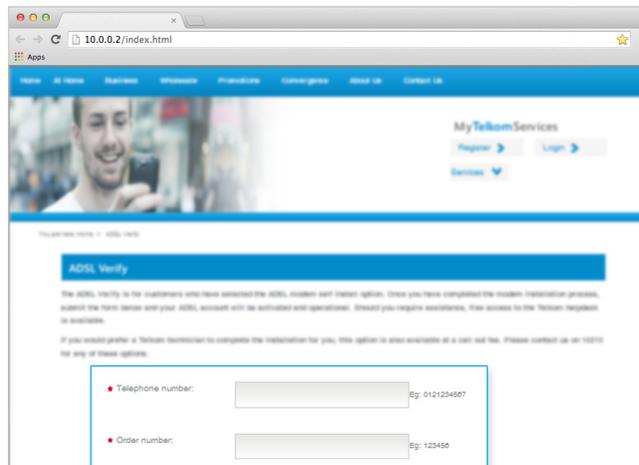

No connection? Don't panic...

- 1 Plug your dongle into the back of your router.

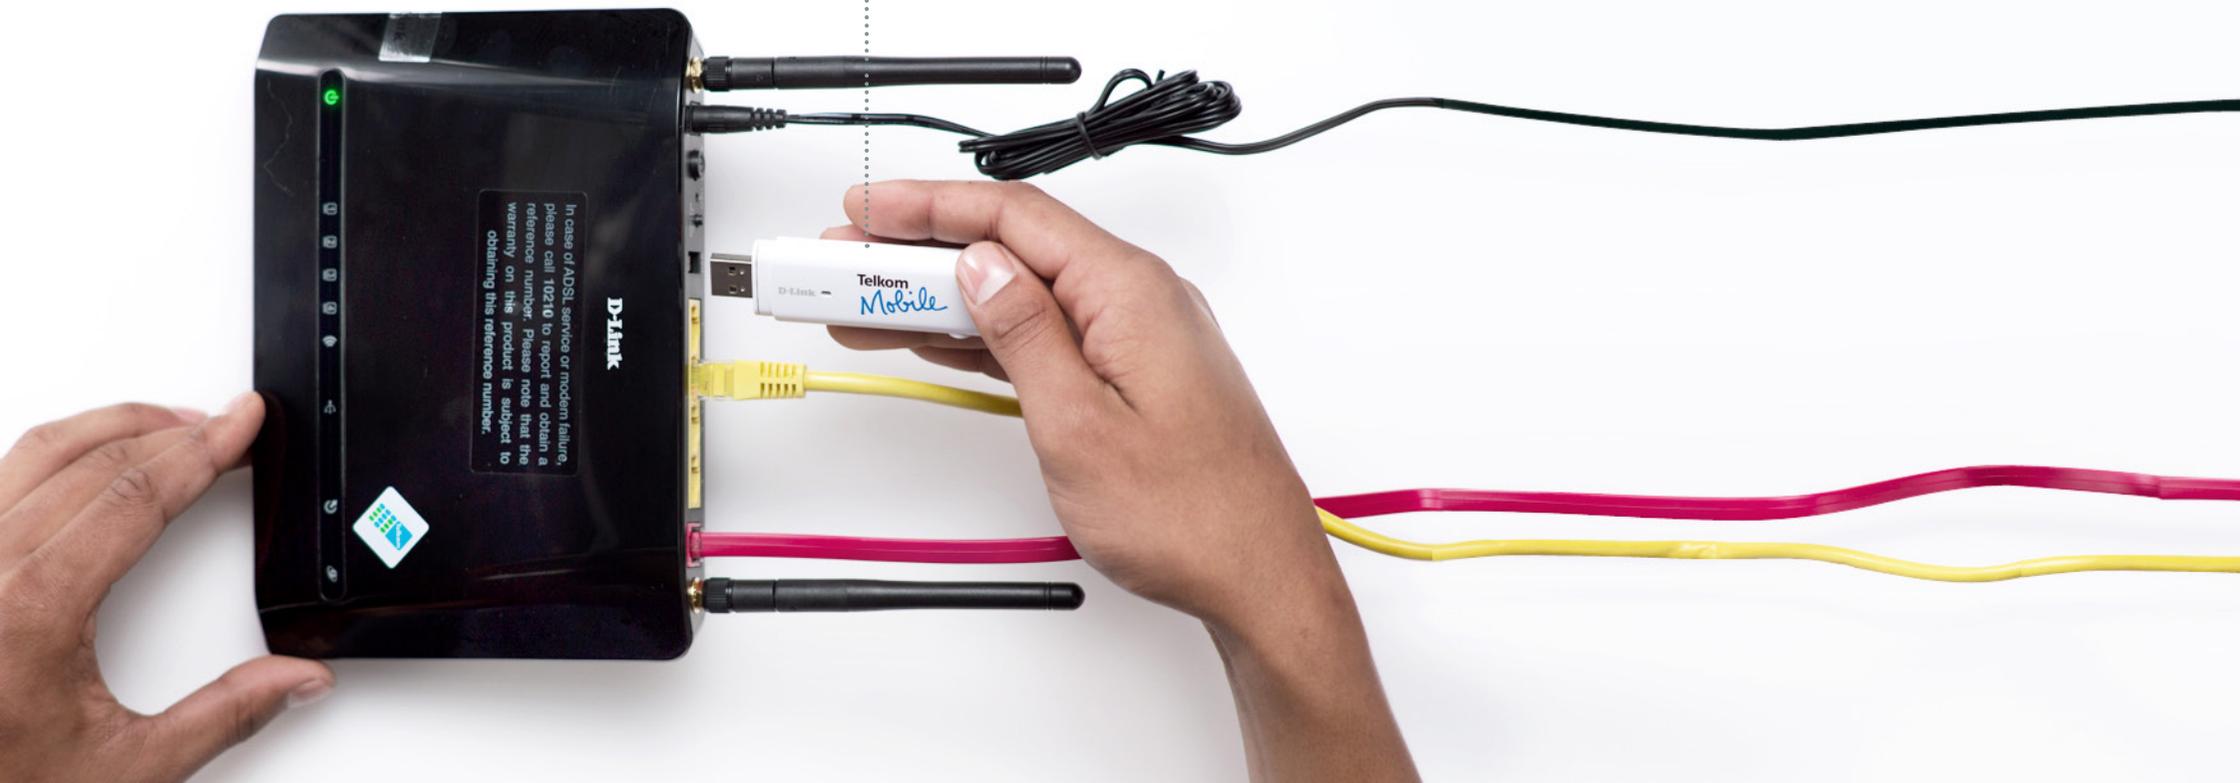

Setting up the Dongle.


1

Open your web browser and go to <http://10.0.0.2>. Type in **admin** as your username and your new password, if you changed it. Otherwise use the default **admin** password. Click **3G Internet Setup**.




2

Click **Add**.

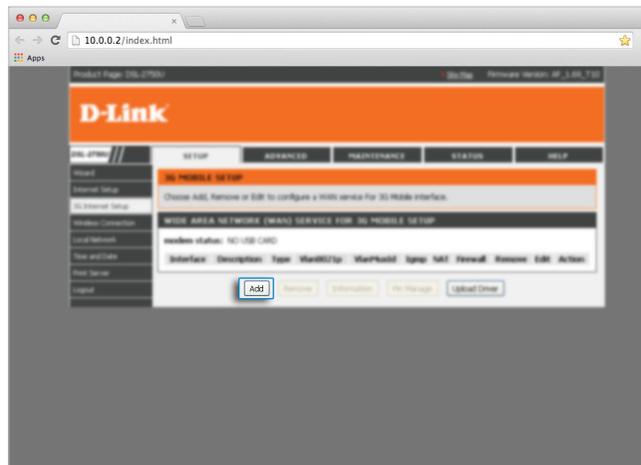

3


Click **Auto Settings**.

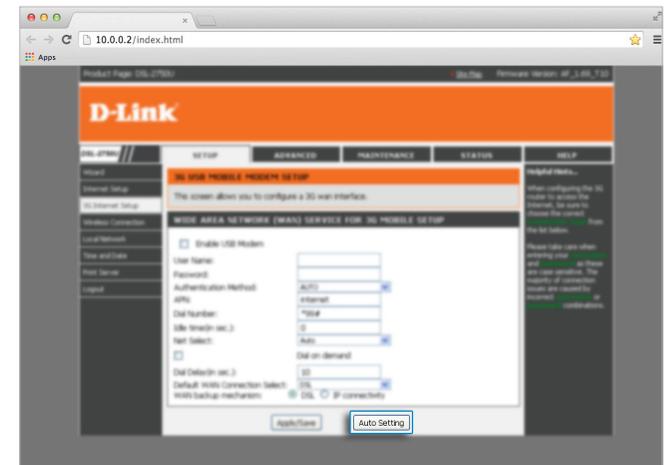

Last few steps.


4

Click **Apply/Save**.

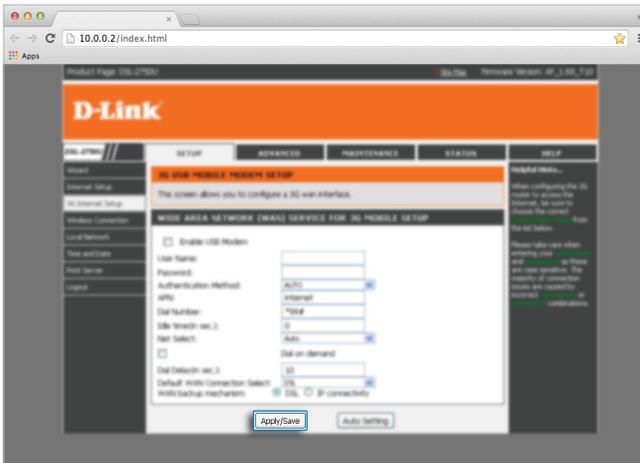


5

Click **3G Internet Setup** from the left navigation menu to refresh the page, and if your SIM card requires a pin, click the **Pin Manage** button.

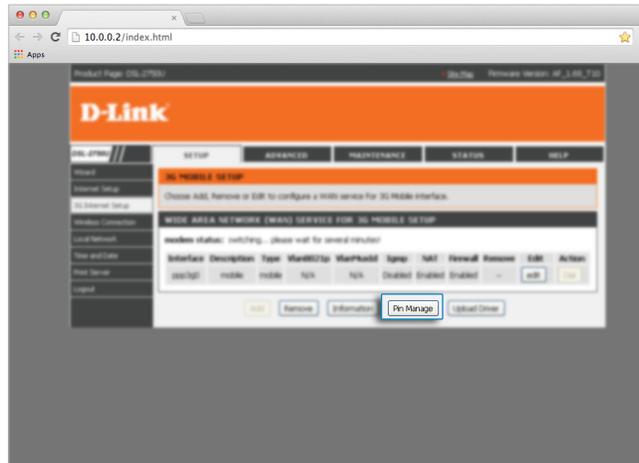

6

Enter the SIM's Pin and click **Submit**.

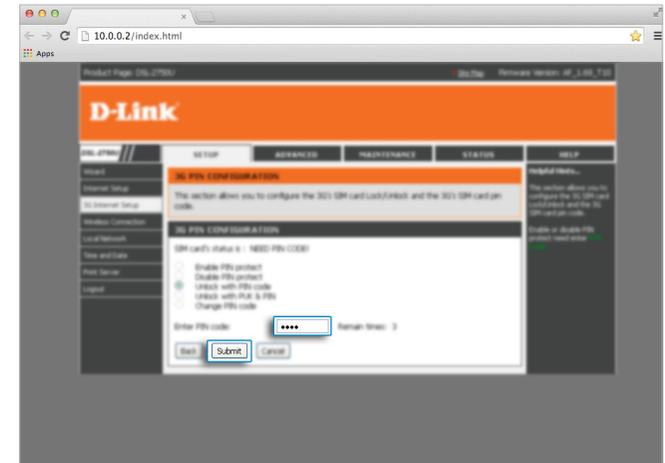

Done. You're connected.

If you still need help
call us on 10210.



Telkom