



## DSL-G2562DG ADSL/VDSL Wizard Setup Guide

- 1) Type in the IP address bar 10.0.0.2 into your web-browser (IE, Chrome, Firefox etc)

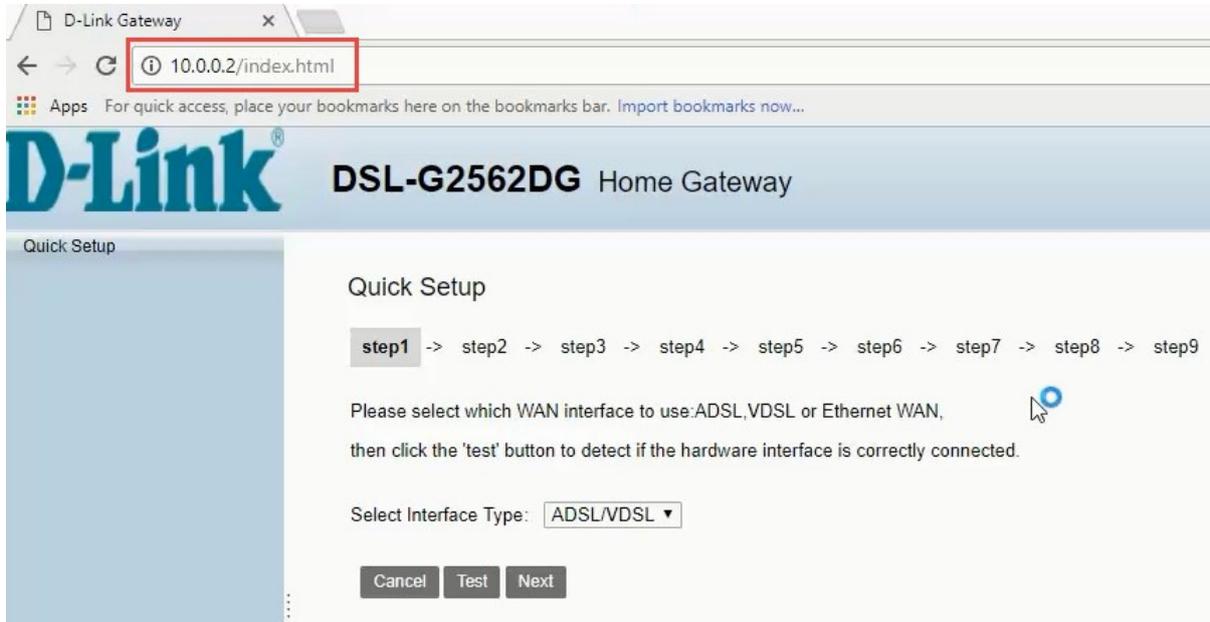

- 2) Make sure your router is connected as per the Quick Installation Guide (QIG) for DSL service.  
Select Interface Type: ADSL/VDSL  
Click on [Test] to confirm your connection  
Click on [Next] to proceed

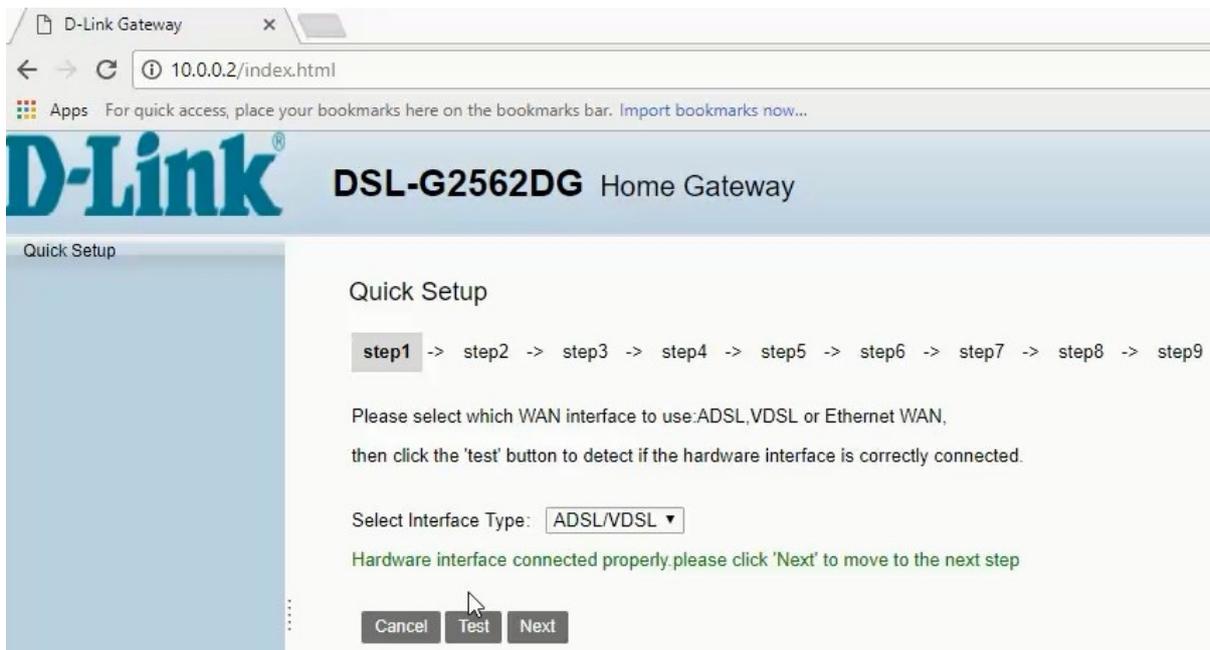


- 3) Click on [Test] to confirm your default PPP account  
Click on [Next] to proceed

**Note:** If the test fails, please contact Telkom Support for port recreation/verification



The screenshot shows the D-Link DSL-G2562DG Quick Setup wizard. The header includes the D-Link logo and the product name. The page title is "Quick Setup". A progress bar shows steps 1 through 9, with "step2" highlighted. Below the progress bar, there is a message: "Please click the 'Test' button to detect whether the default PPP account is correct." Below this message, it says "PPP account test passed! Please click 'Next'." At the bottom, there are four buttons: "Back", "Reset", "Test", and "Next". A mouse cursor is pointing at the "Next" button.

- 4) For new DSL line installation, make sure the correct option is ticked and click the URL to proceed  
This will take you to the Telkom Webpage for DSL verification

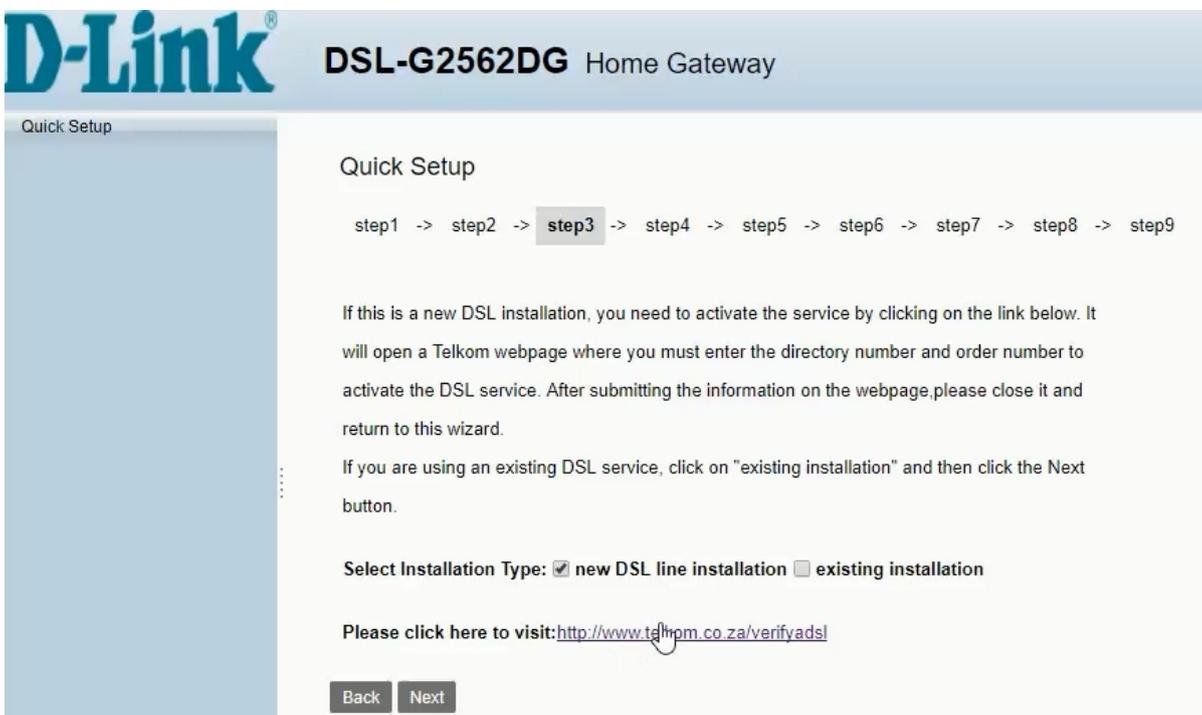


The screenshot shows the D-Link DSL-G2562DG Quick Setup wizard. The header includes the D-Link logo and the product name. The page title is "Quick Setup". A progress bar shows steps 1 through 9, with "step3" highlighted. Below the progress bar, there is a message: "If this is a new DSL installation, you need to activate the service by clicking on the link below. It will open a Telkom webpage where you must enter the directory number and order number to activate the DSL service. After submitting the information on the webpage, please close it and return to this wizard." Below this message, it says "If you are using an existing DSL service, click on 'existing installation' and then click the Next button." Below this message, there is a section "Select Installation Type:" with two radio buttons: "new DSL line installation" (which is checked) and "existing installation". Below this section, there is a message: "Please click here to visit: <http://www.telkom.co.za/verifydsl>". At the bottom, there are two buttons: "Back" and "Next". A mouse cursor is pointing at the "Next" button.

- 5) Continue as instructed on the Telkom Webpage  
If you have not received your PPPoE details,  
→ proceed with [Configure your modem with your Telkom Internet account]  
If you have your PPPoE details sent to you via SMS, proceed with <http://10.0.0.2>  
→ Click on [Next] to proceed to Step 4



- 6) Enter your PPPoE account details received from Telkom via SMS  
Click on [Next] to proceed  
**Note:** Your PPPoE details should have been sent to you in an SMS and should end with @telkomsa.net  
If you do not have these details please contact Telkom support to retrieve your details

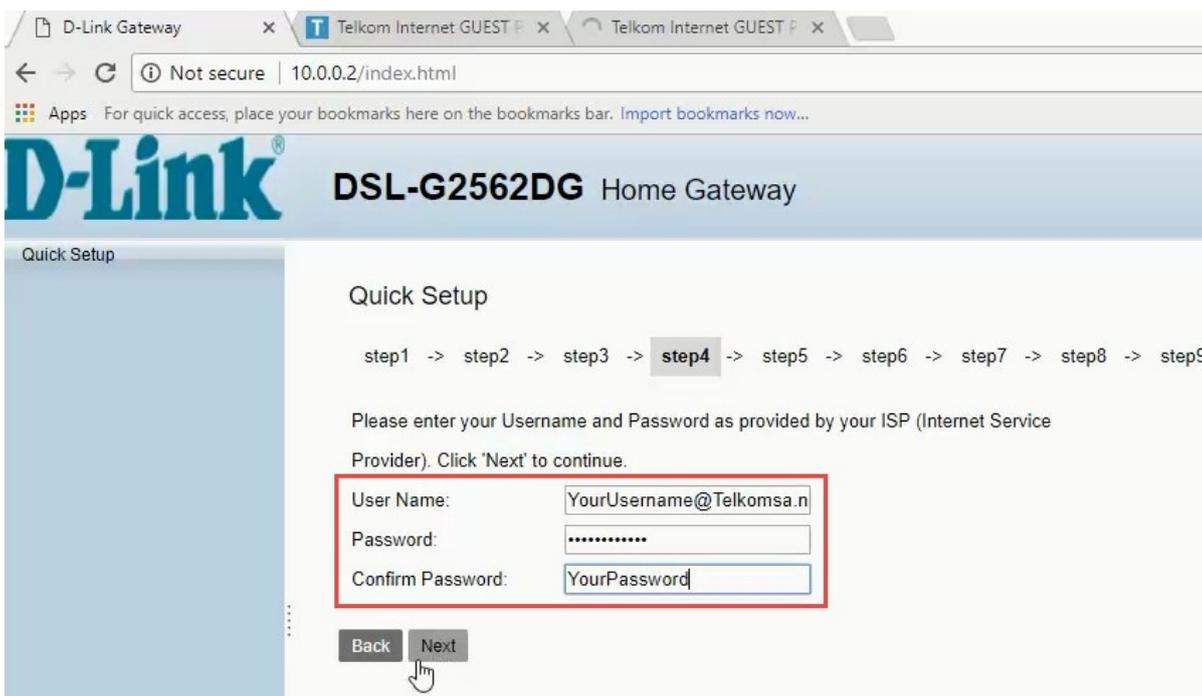

7) Click on [Test] to test account.

Click on [Next] to proceed

**Note:** If the test fails, please make sure the correct details were entered on step 4  
Alternatively, contact Telkom Support for a password reset



8) D-Link modem comes set with unique default WIFI password on both the 2.4 & 5 GHz band for security purposes. The default password can be located on the back of the router. You can change the default password for both bands below (minimum of 8 characters) or [skip] to leave as default. Click on [Next] to proceed.

**Note:** Write down the passwords somewhere safe as you will need them to connect to your Wi-Fi



9) For security purposes, it is strongly advised that you change our default modem login password during the first setup.

Default AdminName: admin / AdminPassword: admin

Fill in new username & password for logging into your router

Click on [Next] to proceed



10) If you are subscribed to Telkom VPN Lite's services, entered the details provided.  
If not, click on [Skip] to proceed

11) Here you will be able to see a summary of the wizard setup. Click on [Apply] to complete the setup.  
You will be taken back to modem login page. You can login to the modem with the details set on step 9 above.

**D-Link** DSL-G2562DG Home Gateway

Quick Setup      step1 -> step2 -> step3 -> step4 -> step5 -> step6 -> step7 -> step8 -> **step9**

Setup complete.  
Click "Back" to review or modify settings.  
Click "Apply" to apply the current settings.

If your Internet connection does not work after you pressed apply, you can try the Setup Wizard again with alternative settings or use Manual Setup instead if you have your Internet connection details as provided by your ISP.

Site Username:	
Site Password:	
Site LAN IP/Netmask:	/
Web Login Name:	admin
Web Login Password:	Mylogindetails
SSID 2.4GHz:	D-Link-2.4G
2.4G WPA Preshare key:	MyWiFiPassword
SSID 5GHz:	D-Link-5G
5G WPA Preshare key:	MyWiFiPassword