


DSL-G2562DG ADSL/VDSL Setup via Android

- 1) Click on the settings app on your home screen
- 2) Select Wi-Fi from the list
- 3) Select D-Link_2.4G from the list of available networks
- 4) When prompted to fill in a password fill in the WPA key from the sticker on the back of your router
- 5) Click on the pop-up prompting you to sign in to Wi-Fi network "D-Link-2.4G"

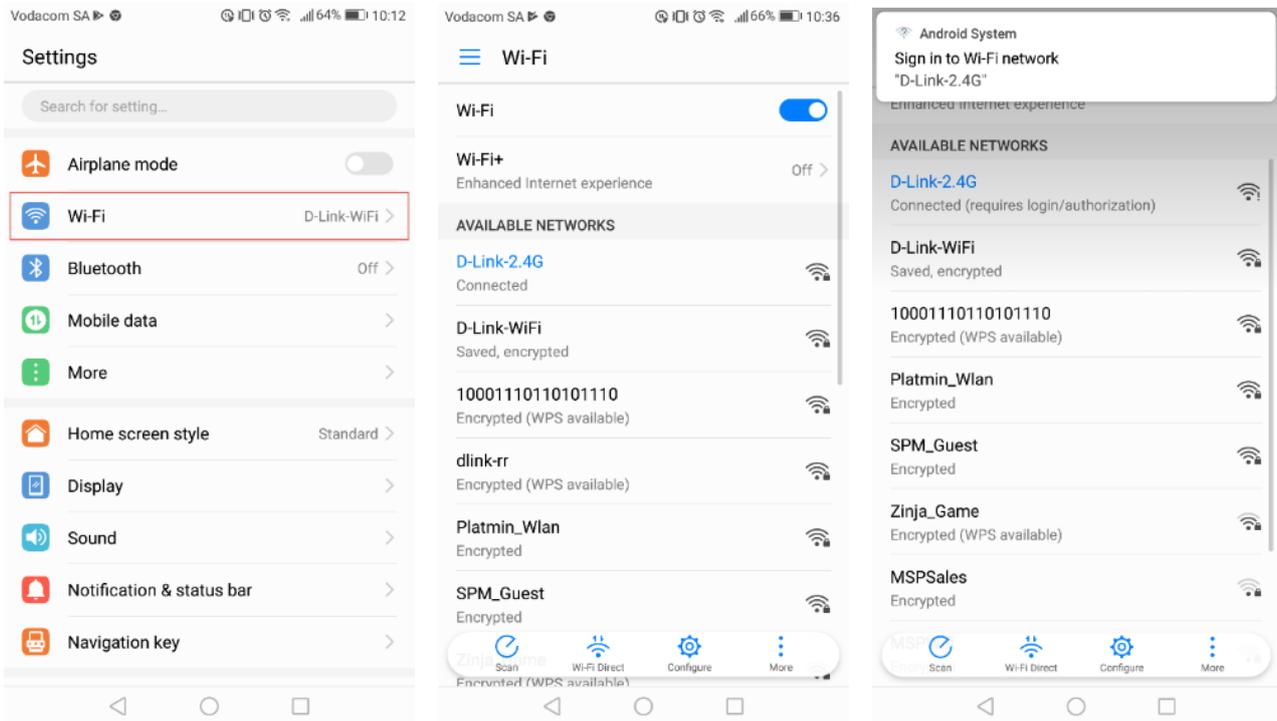

- 6) Select <http://10.0.0.2> on the pop up Telkom page

Welcome to Telkom Internet

Let us help you connect to the Internet:


Step 1
If this is a newly installed ADSL line with the self-install option, please [verify this line](#).

Step 2
If you are a Telkom Internet customer
[Configure your modem with your Telkom Internet account](#)

For all other customers please use the CD supplied with the modem to complete your Internet setup, or [configure your modem](#) using the web interface (e.g. <http://192.168.1.1> or <http://10.0.0.2>), or consult the information on the modem label.

Step 1 of the wizard:


- 7) Make sure your router is connected as per the Quick Installation Guide (QIG) for DSL service.
- 8) Select the interface type: ADSL/VDSL
- 9) Click on [Test] to confirm your connection
- 10) Click on [Next] to proceed

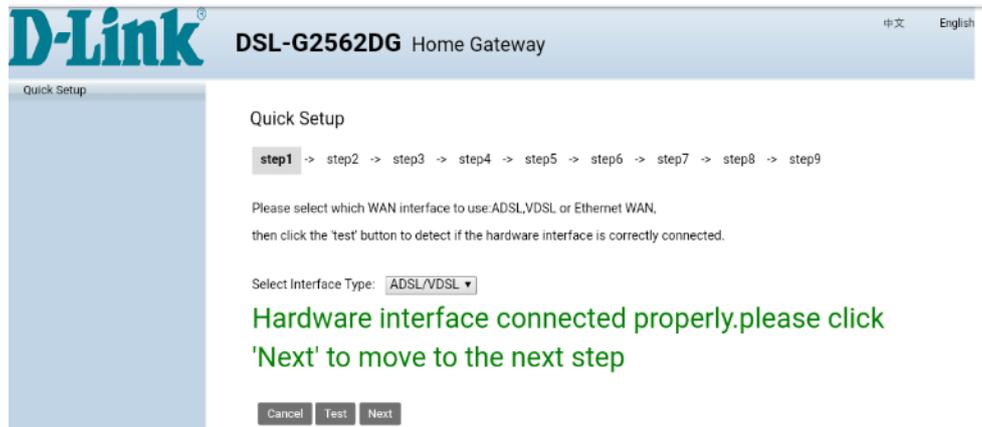

Step 2 of the wizard:


- 11) Click on [Test] to confirm your default PPP account
- 12) Click on [Next] to proceed

Note: If the test fails please contact Telkom support for port recreation/verification

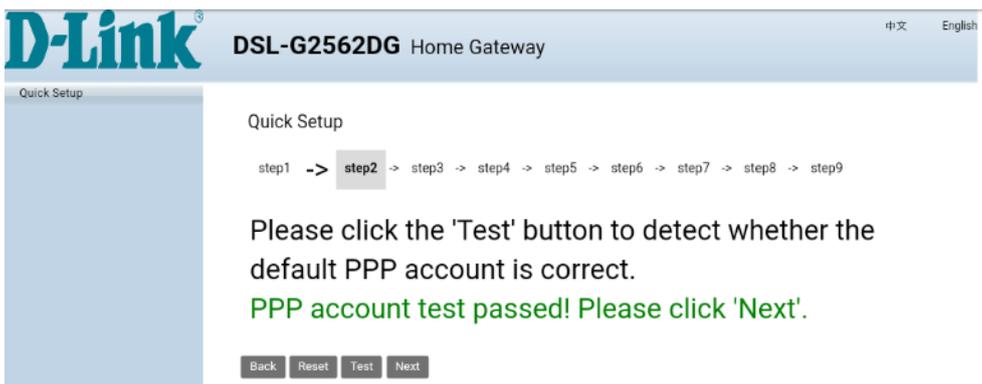

Step 3 of the wizard:

- 13) Select whether the installation is for a new or existing line
- 14) Click on the link: <http://www.telkom.co.za/verifydsl> for DSL verification

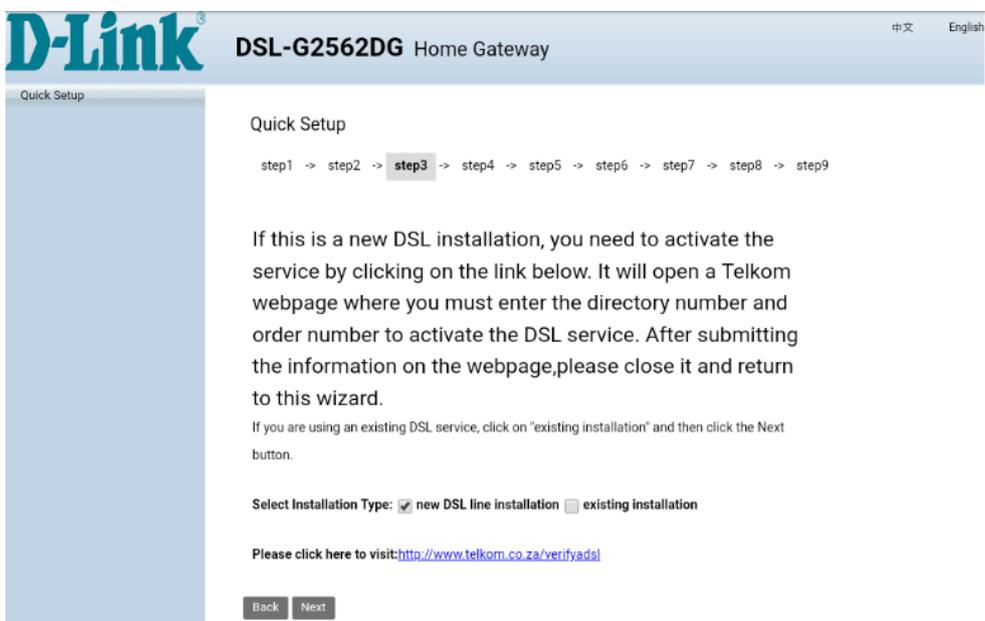

On the Telkom pop up window

15) Continue as instructed on the Telkom Webpage

If you have not received your PPPoE details,

➔ proceed with [Configure your modem with your Telkom Internet account]

If you have your PPPoE details sent to you via SMS, proceed with <http://10.0.0.2>

➔ Click on [Next] to proceed to Step 4

Welcome to Telkom Internet

Let us help you connect to the Internet:

Step 1
If this is a newly installed ADSL line with the self-install option, please [verify this line](#).

Step 2
If you are a Telkom Internet customer
[Configure your modem with your Telkom Internet account](#)

For all other customers please use the CD supplied with the modem to complete your Internet setup, or configure your modem using the web interface (e.g. <http://192.168.1.1> or <http://10.0.0.2>), or consult the information on the modem label.

[PASSWORD RESET FOR TELKOM INTERNET](#)

Step 4 of the wizard:

16) Fill in your PPPoE account details received from Telkom via SMS

17) Click on [Next] to proceed

Note: This should have been sent to you in an SMS and should end with @telkomsa.net

If you do not have these details please contact Telkom support to retrieve your details

D-Link DSL-G2562DG Home Gateway

Quick Setup

Quick Setup

step1 -> step2 -> step3 -> **step4** -> step5 -> step6 ->

Please enter your Username and Password as provided by your ISP (Int
Click 'Next' to continue.

User Name:	<input type="text" value="Username@telkomsa.net"/>
Password:	<input type="password" value="....."/>
Confirm Password:	<input type="password" value="....."/>

Step 5 of the wizard:

- 18) Click on [Test] to test account
- 19) Click on the [Next] button to proceed

Note: If the test fails, please make sure the correct details were entered on step 4

Alternatively, contact Telkom Support for a password reset



Step 6 of the wizard:


- 20) D-Link modem comes set with unique default WIFI password on both the 2.4 & 5 GHz band for security purposes. The default password can be located on the back of the router.
- 21) You can change the default password for both bands below (minimum of 8 characters)
- 22) or [skip] to leave as default.
- 23) Click on [Next] to proceed.

Note: Write down the passwords somewhere safe as you will need them to connect to your Wi-Fi




Step 7 of the wizard:

- 24) For security purposes, it is strongly advised that you change our default modem login password during the first setup.
Default AdminName: admin / AdminPassword: admin
- 25) Fill in new username & password for logging into your router
- 26) Click on [Next] to proceed

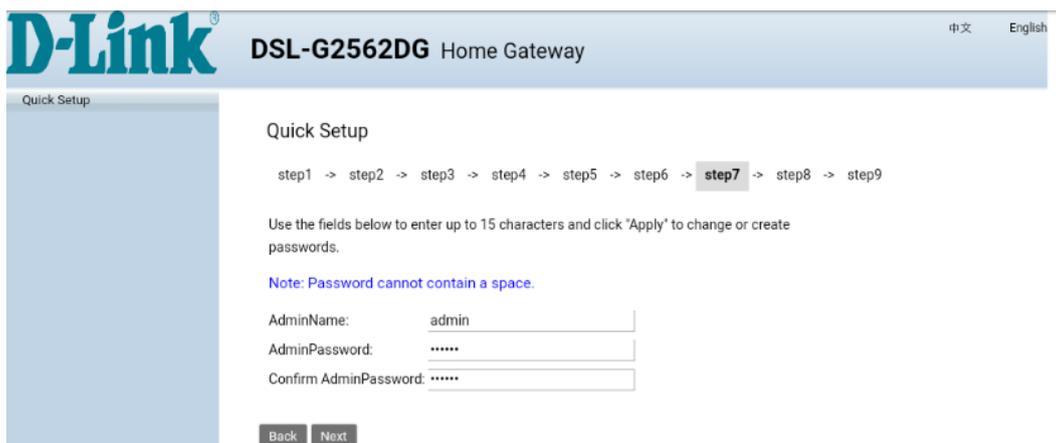

Step 8 of the wizard (for VPN customers only)


27) If you are subscribed to Telkom VPN Lite's services, enter the details provided below.
If not, click on [Skip] to proceed

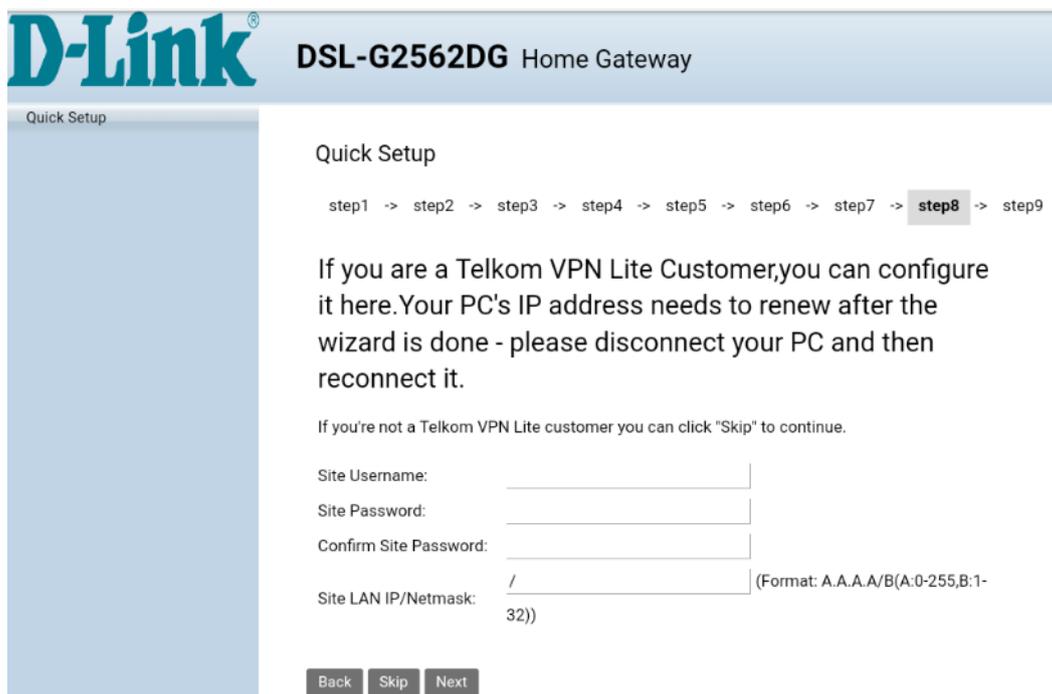

The screenshot shows the 'Quick Setup' page for a D-Link DSL-G2562DG Home Gateway. The page title is 'D-Link DSL-G2562DG Home Gateway'. The breadcrumb trail is 'step1 -> step2 -> step3 -> step4 -> step5 -> step6 -> step7 -> step8 -> step9', with 'step8' highlighted. The main text reads: 'If you are a Telkom VPN Lite Customer, you can configure it here. Your PC's IP address needs to renew after the wizard is done - please disconnect your PC and then reconnect it.' Below this, it says: 'If you're not a Telkom VPN Lite customer you can click "Skip" to continue.' There are four input fields: 'Site Username:', 'Site Password:', 'Confirm Site Password:', and 'Site LAN IP/Netmask:'. The 'Site LAN IP/Netmask' field has a format hint: '(Format: A.A.A.A/B(A:0-255,B:1-32))'. At the bottom, there are three buttons: 'Back', 'Skip', and 'Next'.

Step 9 of the wizard

28) Here you will be able to see a summary of the wizard setup. Click on [Apply] to complete the setup.
You will be taken back to modem login page. You can login to the modem with the details set on step 7 of the wizard.

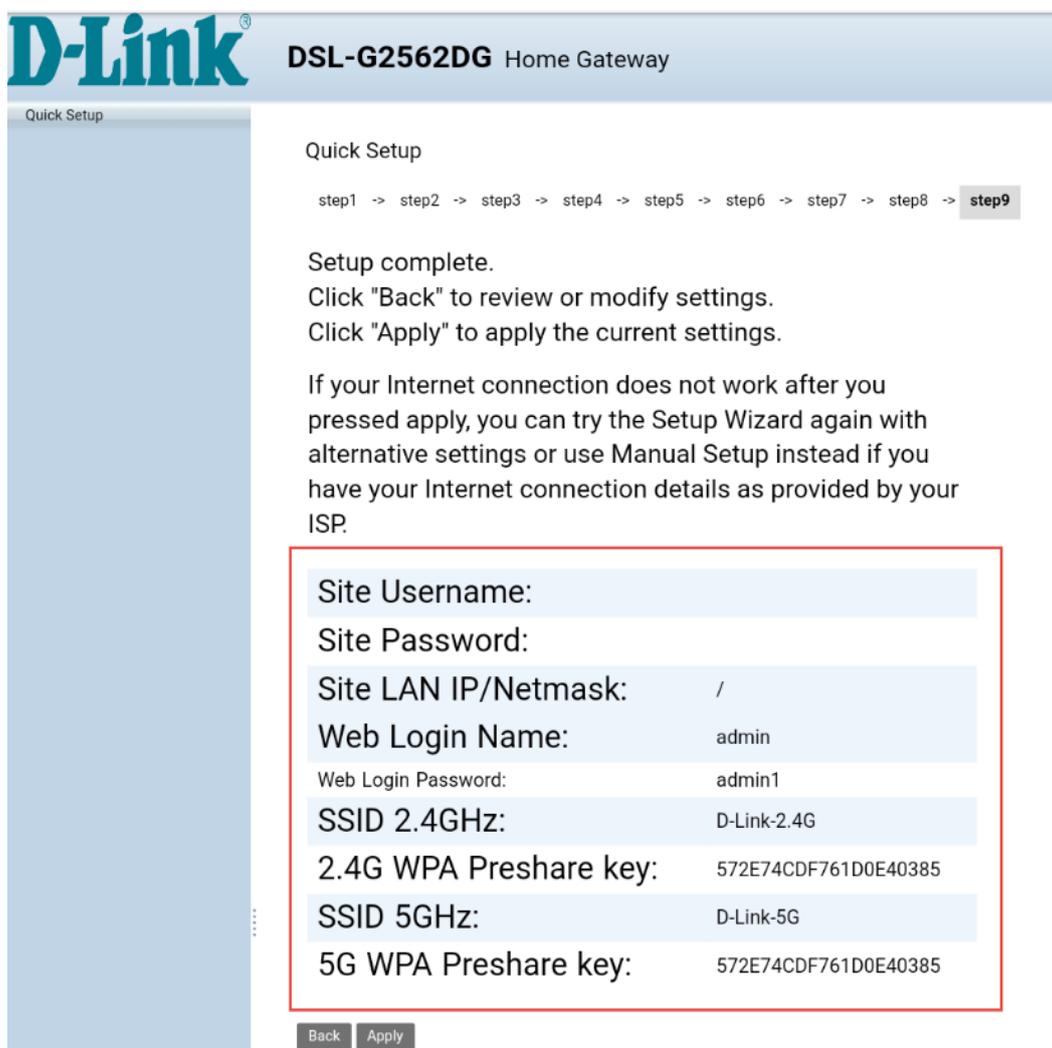

The screenshot shows the 'Quick Setup' page for a D-Link DSL-G2562DG Home Gateway. The page title is 'D-Link DSL-G2562DG Home Gateway'. The breadcrumb trail is 'step1 -> step2 -> step3 -> step4 -> step5 -> step6 -> step7 -> step8 -> step9', with 'step9' highlighted. The main text reads: 'Setup complete. Click "Back" to review or modify settings. Click "Apply" to apply the current settings.' Below this, it says: 'If your Internet connection does not work after you pressed apply, you can try the Setup Wizard again with alternative settings or use Manual Setup instead if you have your Internet connection details as provided by your ISP.' A red-bordered box highlights a summary table of settings:

Site Username:	
Site Password:	
Site LAN IP/Netmask:	/
Web Login Name:	admin
Web Login Password:	admin1
SSID 2.4GHz:	D-Link-2.4G
2.4G WPA Preshare key:	572E74CDF761D0E40385
SSID 5GHz:	D-Link-5G
5G WPA Preshare key:	572E74CDF761D0E40385


At the bottom, there are two buttons: 'Back' and 'Apply'.

If you changed the WiFi passwords as well as the SSID (WiFi name) on Step 6

- 29) Click on the settings app on your home screen
- 30) Select Wi-Fi from the list
- 31) Select the WiFi name that you set on step 6
- 32) Fill in the new WiFi Password you set on Step 6 of the setup wizard

If you only changed the WiFi passwords on Step 6 (D-Link-2.4G and D-Link-5G WiFi names still the same)

- 33) Click on the settings app on your home screen
- 34) Select Wi-Fi from the list
- 35) Press and hold D-Link-2.4G till more options pop up
- 36) Select forget network
- 37) Select D-Link-2.4G again an now fill in the new WiFi Password you set on Step 6 of the setup wizard
- 38) The same process applies to D-Link-5G

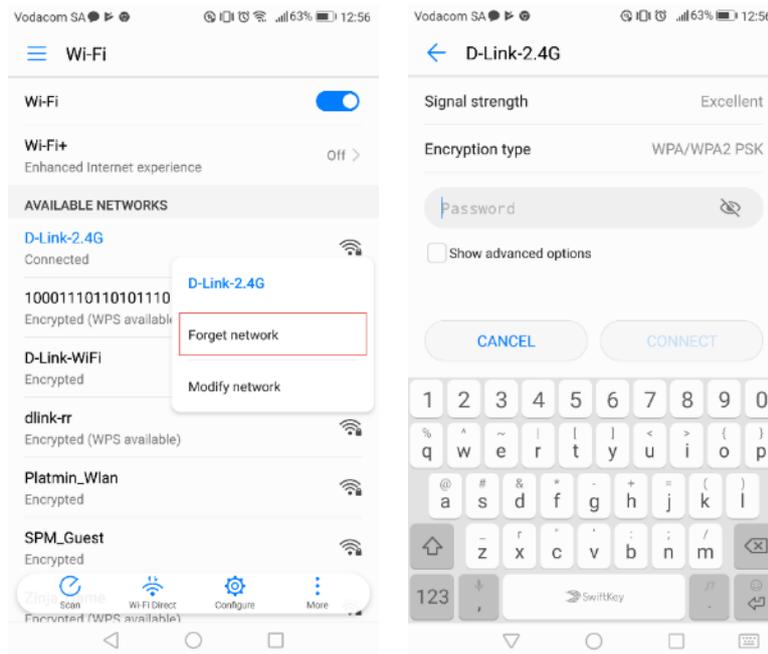

YOU ARE NOW READY TO SURF THE INTERNET