



DSL-G2562DG Fibre Setup with PPPoE details

- 1) Type in the IP address bar 10.0.0.2 into your web-browser (IE, Chrome, Firefox etc)

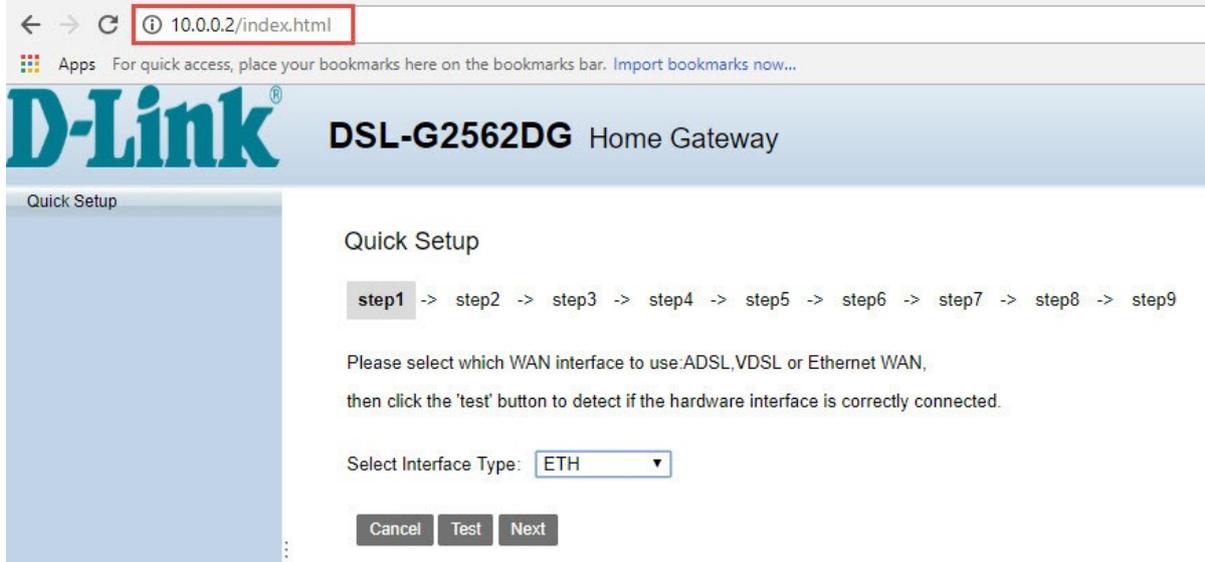

- 2) Make sure your router is connected as per the Quick Installation Guide (QIG) for Fibre service.
Select Interface Type: ETH
Click on [Test] to confirm your connection
Click on [Next] to proceed

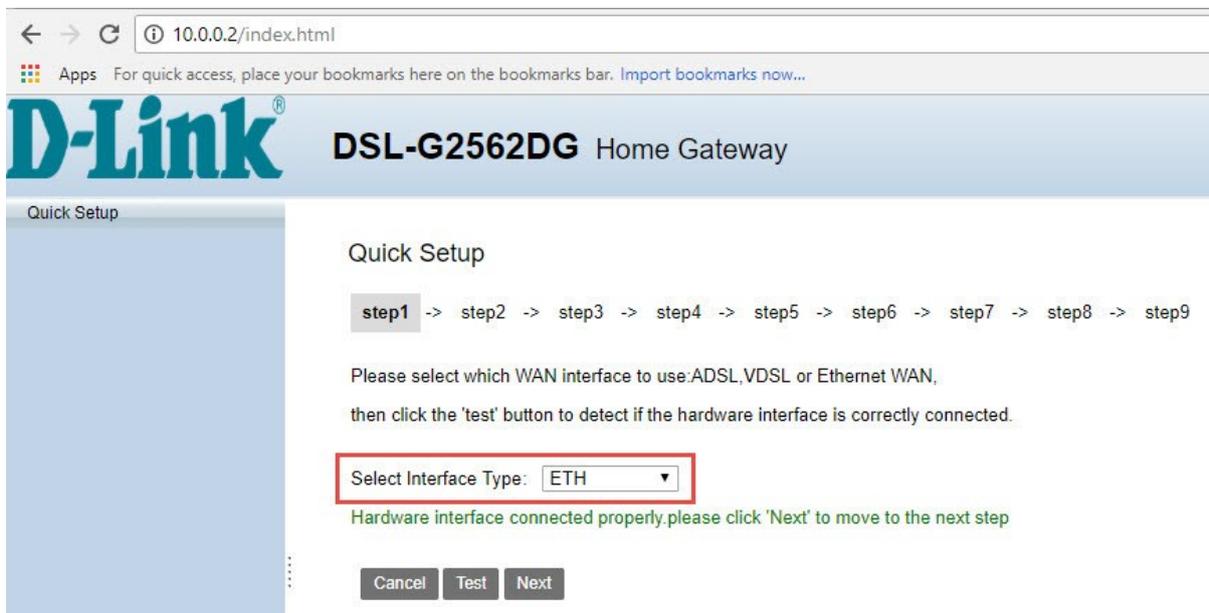


- 3) Click on [Test] to confirm your default PPP account
Click on [Next] to proceed

Note: If the test fails, please contact Telkom Support to confirm that your order has been completed



- 4) For new Fibre line installation, make sure the new line installation option is ticked and
Click on [Next] to proceed

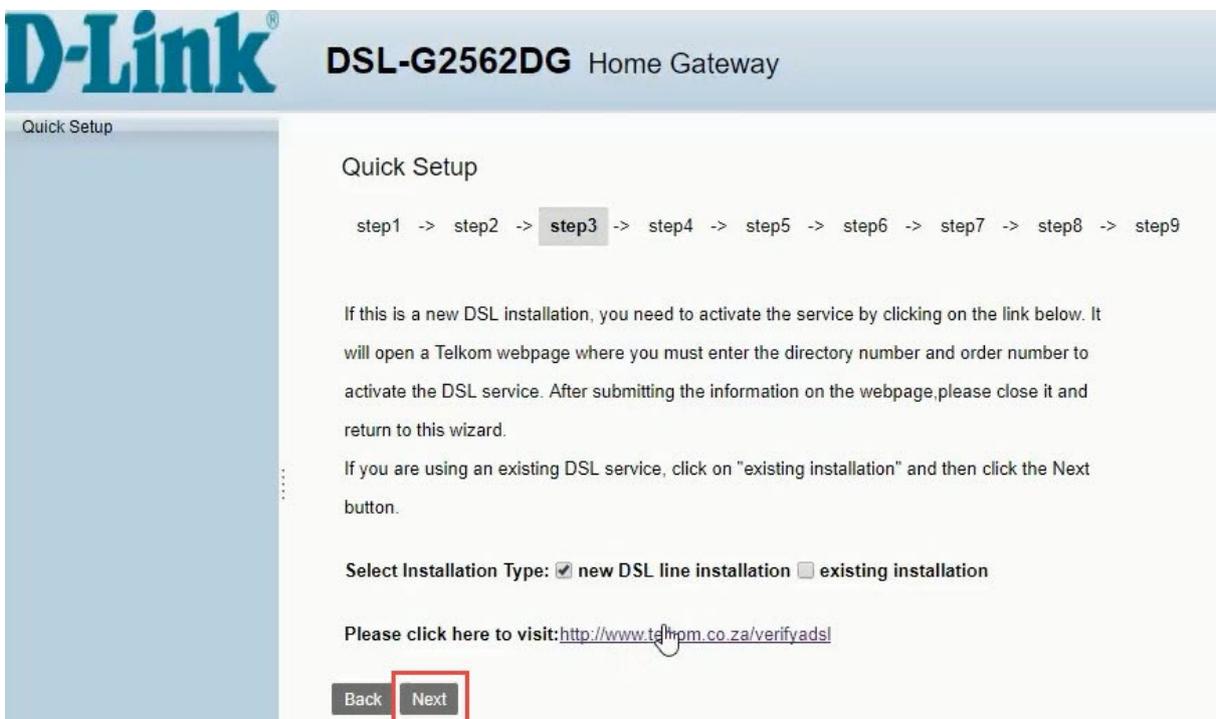

5) Enter your PPPoE account details received from Telkom via SMS

Click on [Next] to proceed

Note: Your PPPoE details should have been sent to you in an SMS and should end with @telkomsa.net
If you do not have these details please contact Telkom support to retrieve your details

The screenshot shows a web browser window with the URL 10.0.0.2/index.html. The page title is "D-Link DSL-G2562DG Home Gateway". The "Quick Setup" section shows a progress bar with steps 1 through 9, where "step4" is highlighted. Below the progress bar, the text reads: "Please enter your Username and Password as provided by your ISP (Internet Service Provider). Click 'Next' to continue." There are three input fields: "User Name:" with the value "YourUsername@Telkomsa.n", "Password:" with masked characters "*****", and "Confirm Password:" with the value "YourPassword". A red box highlights these three fields. At the bottom, there are "Back" and "Next" buttons, with a mouse cursor pointing to the "Next" button.

6) Click on [Test] to test account.

Click on [Next] to proceed

Note: If the test fails, please make sure the correct details were entered on step 4
Alternatively, contact Telkom Support for a password reset

The screenshot shows the same web browser window as the previous step. The "Quick Setup" section shows a progress bar with steps 1 through 9, where "step5" is highlighted. Below the progress bar, the text reads: "Please click on the 'Test' button to test whether the configured account is valid." Below this, a green message states: "The configured account is valid, please click 'Next' to the next step." At the bottom, there are three buttons: "Back", "Test", and "Next", with a mouse cursor pointing to the "Next" button.

- 7) D-Link modem comes set with unique default WIFI password on both the 2.4 & 5 GHz band for security purposes. The default password can be located on the back of the router. You can change the default password for both bands (minimum of 8 characters) or [skip] to leave as default. Click on [Next] to proceed.

Note: Write down the passwords somewhere safe as you will need them to connect to your Wi-Fi

D-Link DSL-G2562DG Home Gateway

Quick Setup

step1 -> step2 -> step3 -> step4 -> step5 -> **step6** -> step7 -> step8 -> step9

SSID 2.4GHz:	D-Link-2.4G
2.4G WPA Preshare key:
SSID 5GHz:	D-Link-5G
5G WPA Preshare key:	MyWiFiPassword

Back Skip Next

- 8) For security purposes, it is strongly advised that you change our default modem login password during the first setup. Default AdminName: admin / AdminPassword: admin
Fill in new username & password for logging into your router
Click on [Next] to proceed

D-Link DSL-G2562DG Home Gateway

Quick Setup

step1 -> step2 -> step3 -> step4 -> step5 -> step6 -> **step7** -> step8 -> step9

Use the fields below to enter up to 15 characters and click "Apply" to change or create passwords.

Note: Password cannot contain a space.

AdminName:	admin
AdminPassword:
Confirm AdminPassword:

Back Next

- 9) If you are subscribed to VPN Lite's services, entered the details provided.
If not, click on [Skip] to proceed

- 10) Here you will be able to see a summary of the wizard setup. Click on [Apply] to complete the setup.
You will be taken back to modem login page. You can login to the modem with the details set on step 9 above.

D-Link DSL-G2562DG Home Gateway

Quick Setup

step1 -> step2 -> step3 -> step4 -> step5 -> step6 -> step7 -> step8 -> **step9**

Setup complete.
Click "Back" to review or modify settings.
Click "Apply" to apply the current settings.

If your Internet connection does not work after you pressed apply, you can try the Setup Wizard again with alternative settings or use Manual Setup instead if you have your Internet connection details as provided by your ISP.

Site Username:	
Site Password:	
Site LAN IP/Netmask:	/
Web Login Name:	admin
Web Login Password:	Mylogindetails
SSID 2.4GHz:	D-Link-2.4G
2.4G WPA Preshare key:	MyWiFiPassword
SSID 5GHz:	D-Link-5G
5G WPA Preshare key:	MyWiFiPassword

Back Apply